

STATE OF KANSAS STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 800 Bittling Building Wichita, Kansas

Russell County, Sec. 35 Twp. 13 Rge. (E) 14 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NE NE SW

Lease Owner Helmerich & Payne, Inc.

Lease Name P. Boxberger Well No. 1

Office Address 415 Philtower Building, Tulsa, Oklahoma.

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed 2-5 19 44

Application for plugging filed 2-5 19 44

Application for plugging approved 2-5 19 44

Plugging commenced 2-5 19 44

Plugging completed 2-5 19 44

Reason for abandonment of well or producing formation Dry hole, no showing of oil or gas.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander

Producing formation Depth to top Bottom Total Depth of Well 3306 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: Formation, Content, From, To, Size, Put In, Pulled Out. Row 1: Size 8 5/8", Put In 277', Pulled Out None.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole filled with heavy mud 3306' to 263'. Mud pumped in through drill pipe. Bridge set at 263' - 15 sacks cement on top of bridge, filling to 218' - mud from 218' to 26' 7 sacks cement from 26' to 6' or bottom of cellar.



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Helmerich & Payne, Inc.

Address 415 Philtower Building, Tulsa, 3, Oklahoma.

STATE OF Oklahoma, COUNTY OF Tulsa, ss.

I, Harry Saye, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Harry Saye

415 Philtower Building, Tulsa, Oklahoma.

(Address)

SUBSCRIBED AND SWORN TO before me this 10 day of February, 19 44.

Notary Public signature: Rose M. Simpson

Notary Public

My commission expires May 20 - 1946




02-11-1944

D. Boxberger #1
Center SE/4 NW/4 Section 15-14S-14W
Russell County, Kansas
The Texas Company

Commenced: December 7, 1943
Completed: January 12, 1944

Surface hole	0	95	:
Shale, shells and sand	95	380	
Shale and shells	380	780	
Shale and red bed	780	855	
Anhydrite	855	890	
Shale	890	955	
Shale and salt	955	1110	
Shale and shells	1110	1200	
Shale and lime shells	1200	1480	
Shale and shells	1480	1550	
Anhydrite and lime	1550	1600	
Shale and shells	1600	1700	
Lime and shale	1700	1850	
Lime	1850	1870	
Shale and lime	1870	1945	
Lime and sandy shale	1945	1975	
Lime and shale	1975	2158	
Shale	2158	2182	
Shale and lime	2182	2272	
Shale	2272	2335	
Broken lime and shale	2335	2374	
Shale and lime	2374	2768	
Lime	2768	2852	
Sandy and broken lime	2852	2876	
Lime	2876	2952	
Lime and shale	2952	3010	
K. C. Lime	3010	3014	
Lime, med.	3014	3027	
Shale	3027	3033	
Lime	3033	3036	
 TOTAL DEPTH	 3036		

Casing Record:
10 3/4" casing set at 355' and cemented with
300 sacks cement
7" O.D. casing set at 3011' and cemented
with 60 sacks cement

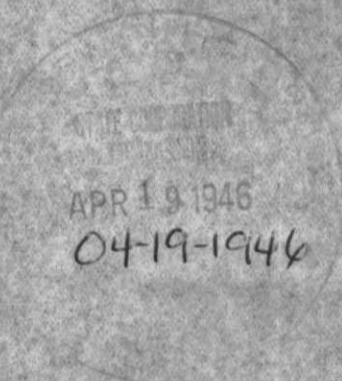

STATE OF OKLAHOMA)
) ss.
COUNTY OF TULSA)

I hereby affirm that the above and foregoing is a true and correct copy of the log of your D. Boxberger Well No. 1, located in the Center of the Southeast Quarter of the Northwest Quarter of Section 15, Township 14 South, Range 14 West, Russell County, Kansas.

33 13 142
107 33

HELMREICH & PAYNE, INC.

By William C. ...
treasurer

Subscribed and sworn to before me, a Notary Public, this 18th day of January, 1944.

Shirley Griffin
Notary Public

My commission expires July 22, 1947.

