


15-167-00565-00-00

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Russell County. Sec. 17 Twp. 13 Rge. 15 (E) (W) X
Location as "NE/CNW&SW¼" or footage from lines NE SE SW
Lease Owner A. F. Schmidt Oil Operations
Lease Name McKune A Well No. #1
Office Address Box 662 Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 10-4-74 19
Plugging completed 10-16-74 19
Reason for abandonment of well or producing formation
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

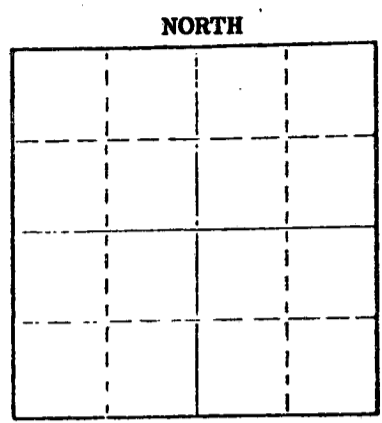

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation Depth to top Bottom Total Depth of Well 3275' F...
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3272 1/2'	88 27'
				8 5/8"	318'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 2975'. Mixed and ran 5 sacks cement thru dump bailer.
Squeezed hole with 2 sacks hulls - 20 sacks gel. Displaced with 100 sacks cement 50/50 pozmix with 4% gel.

RECEIVED
STATE CORPORATION COMMISSION
OCT 18 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364 Great Bend, Kansas
(Address)

Subscribed and sworn to before me this 17 day of October 1974
My commission expires 24 October 1976
Sidney D. Miller
Notary Public.



15-167-00565-00-00
 WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
 508 East Murdock, Wichita, Kansas


COPY

Company- ALEX SCHMIDT
 Farm- McKune No. 1

SEC. 17 T. 13 R. 15W
 NE SE SW

Total Depth. 3275'
 Comm. 9-20-56 Comp. 10-1-56
 Shot or Treated.
 Contractor. S & W Drilg. Co.
 Issued. 1-3-59

County Russell
 KANSAS



Elevation. 1848' KB

Production. 50 BOPD

CASING:
 8 5/8" 318' cem w/200 sx.
 5" 3270'

Figures Indicate Bottom of Formations.

post rock, shale & sand	318
shale, shells & red bed	905
Anhydrite	941
shale & shells	1700
lime and shale	2400
shale and shells	2743
lime	2873
lime and shale	2970
lime	3271
Arbuckle	3275
Total Depth	
TOPS:	
Anhydrite	905
Topeka (scout)	2735
Heebner	2959
Lansing	3006
Arbuckle	3271

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 3 1975
 01-03-1975
 CONSERVATION DIVISION
 Wichita, Kansas