

15-167-03887-00-00


FORM CP-4

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Russell County, Sec 17 Twp 13 Rgn 15 (E) (W) X

Location as "NE/CNWSW" or footage from lines SE SE SW  
Lease Owner A. F. Schmdit Oil Operations  
Lease Name ~~McKine~~ McKune <sup>ASB KCC</sup> Well No. #2 SWD  
Office Address Box 662 Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 10-7-74 19  
Plugging completed 10-16-74 19  
Reason for abandonment of well or producing formation

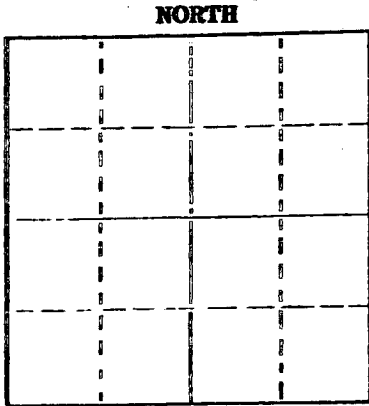

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Donald Truan  
Producing formation Depth to top Bottom Total Depth of Well 3348' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3328'	577.79'
				8 5/8"	486'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3000'. Mixed and ran 4 sacks cement thru dump bailer.  
Squeezed hole with 3 sacks hulls and 20 sacks gel. Released plug and displaced with 100 sacks cement 50/50 pozmix 4% gel.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 18 1974  
10-18-1974  
CONSERVATION DIVISION  
Wichita, Kansas


Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton SE  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.  
Box 364 Great Bend, Kansas  
(Address)

Subscribed and Sworn to before me this 17 day of October, 1974

Sidney D. Miller  
Notary Public.



WELL LOG

COMPANY A. F. Schmidt  
 CONTRACTOR S & W Drilling Company  
 FARM McKune #2  
 LOCATION SE SE SW of 17-13-15N  
 Russell County, Kansas  
 ELEVATION 1853 KB  
 SURFACE CASING 8 5/8" cemented at 486' w/250 Pozmix, 2% cc  
 COMMENCED June 12, 1957  
 COMPLETED June 23, 1957

Formation	Depth
Post Rock	40
Shale and Sand	350
Shale and Shells	525
Red Bed, Shale and Shells	917
Anhydrite	948
Shale and Shells	1620
Broken Lime and Shale	2380
Shale and Shells	2753
Lime	2970
Lime and Shale	3030
Lime	3278
Arbuckle	3378
Rotary Total Depth	3378

ICPS

Anhydrite	917 (✓ 936)
Heebner	2967 (-1114)
Lansing	3016 (-1163)
Arbuckle	3278 (-1425)

ΔΕΕΙΒΑΥΙΙ

STATE OF Kansas, COUNTY OF Barton, SS

I, Floyd W. Smith, of the S & W Drilling Company, being first duly sworn on oath, state; That I have knowledge of the facts, statements and matters herein contained and that the same are true and correct.

Floyd W. Smith  
 Floyd W. Smith

Subscribed and sworn to before me this 8th day of July, 1957.

Dean E. Cooley  
 Dean E. Cooley  
 Notary Public

My commission expires: April 29, 1961