


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

15-051-02166-0000

Ellis County, Sec. 14 Twp. 11 Rge. 17 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NW SW SE
Lease Owner Great Bend Pipe & Supply Co., Inc.
Lease Name Henry Mai Well No. 2
Office Address Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 6-11-62 19____
Plugging completed 6-14-62 19____
Reason for abandonment of well or producing formation Depleted.

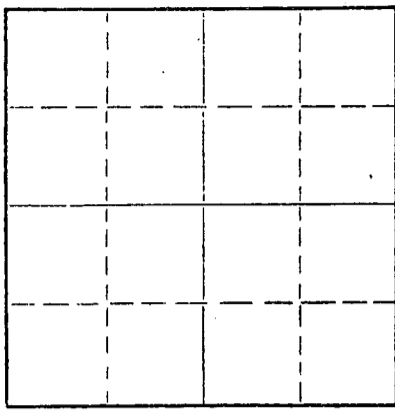

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3365 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				16"	53'	None
				9-5/8"	1095'	None
				7"	3360'	2350'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 3365', sanded to 3350' and dumped 5 sacks of cement @ 3350' with dump bailer. Pulled 7" casing. Pumped mud to 450' and ran 25 sacks of cement. Pumped mud to 200', ran 25 sacks of cement. Mudded to 25' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
JUN 20 1962
CONSERVATION DIVISION
Wichita, Kansas
RCW
6-20-62

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of June, 1962

My commission expires May 20, 1964

Milton J. Volin
Notary Public.

Formation Log

0'	to 60'	Surface clay
312		Shale & shells
420		Sand
512		Shale
560		Hard sand
615		Shale
790		Sandy shale
900		Sticky shale
1055		Shale
1070		Sand
1100		Anhydrite
2000		Lime
2060		Shale & shells
2144		Broken lime
2220		Lime
2235		Shale
2285		Lime
2290		Shale
2475		Lime & shale
2670		Shale & shells
2755		Shale
2932		Lime
2957		Shale
3025		Lime
3071		Broken lime
3196		Lime
3235		Lime & shale
3345		Lime
3354		Green shale
3367		Lime

Gulf Oil Corp.

H. Mai No. 2

C NW SW SE,

Section 14-11S-17W

Ellis County, Kansas

Well Completed 5-3-39

15-051-02166-0000

TOTAL DEPTH