

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Ellis County, Sec. 15 Twp. 11 Rge. 17W (E) (W)

Location as "NE/CNW/SW" or footage from lines SE SE SE

Lease Owner Morgenstern & Specter

Lease Name Richmond Well No. 2

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed 12-8-37 19

Application for plugging filed July 14, 1963 19

Application for plugging approved July 15, 1963 19


Plugging commenced October 9, 1963 19

Plugging completed October 11, 1963 19

Reason for abandonment of well or producing formation failure to produce profitably

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

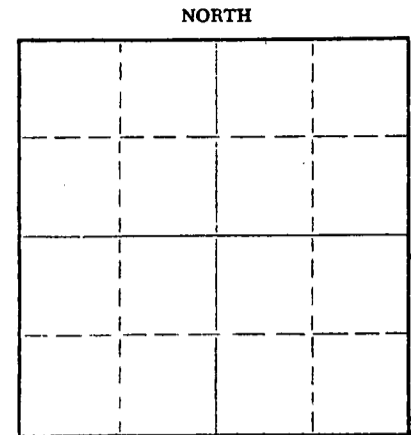

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty Hays, Kansas

Producing formation Arbuckle Depth to top 3406 Bottom 3410 Total Depth of Well 3410 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4" OD	1015	none
				7" OD	3396 1/2	1589 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged, back with sand to 3000- feet, dumped 5- sacks cement,
Circulated Mud at 500- feet, pumped 25- sacks cement at 500- feet.
Pumped 25- sacks cement at 200- feet, put ten sacks on top.

RECEIVED
STATE CORPORATION COMMISSION

OCT 21 1963

10-21-63

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing Pulling Company No. 457

Address R.Rt. 4 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
Morgenstern & Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. Specter
Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 18th day of October, 1963

W. W. Dawson
Notary Public.



15-051-05734-0000

THE BLACKWELL OIL & GAS CO.
Richmond No. 2.

SEC. 15 T. 11 R. 17W
SE SE SE
330' N SL 2310' E WL

County. Ellis

Total Depth. 3410'
Comm. 10-29-37 Comp. 12-5-37
Shot or Treated.
Contractor.
Issued. 12-25-37

CASING: Rotary O-3399
Cable 3399-3410
15 1/2" 18'
10" 1015'
7" 3396'6"



Elevation.

Production. Pot. 2000 B.

Figures Indicate Bottom of Formations.

surface	18	Siliceous lime 3398-3410
shale & shells	370	
clay, sand particles	841	
red bed & shale	1060	
shale	1100	
lime & shale	1200	
red bed & shells	1387	
shale	1418	
salt & shale	1515	
sdv shale	1600	
lime & shale	1716	
lime	1812	
lime & shale brks	1860	
shale & lime shells	1896	
shale	1975	
lime	2052	
brkn lime & shale	2086	
lime	2100	
shale	2110	
shale & lime	2190	
lime & shale brks	2333	
lime & shale	2510	
shale	2591	
sdv shale	2700	
shale & lime	2865	
lime	3087	
lime & shale	3092	
shale & red rock	3108	
lime	3325	
brkn lime & shale	3335	
rod rock	3341	
brkn lime & chert	3367	
conglomerate	3375	
Simpson dolomite, strks of		
green shale	3385	
sdv shale sprinkled with		
bright green	3398	
lime	3399	
lime Siliceous	3406	
Started swabbing oil		
lime drilled	3410	
Total Depth.		

RECEIVED
STATE CORPORATION COMMISSION

JUL 15 1963

CONSERVATION DIVISION
Wichita, Kansas

Made approx. 2000 bbls on Pot. test.