


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Flat

Russell County. Sec. 25 Twp. 13 Rge. 15 (E) W (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines S $\frac{1}{2}$ NE NE
Lease Owner Bishop Oil Company
Lease Name Strecker Well No. 1
Office Address 316 Brown Bldg, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 7 19 51
Application for plugging filed March 13 19 51
Application for plugging approved 19
Plugging commenced March 3 19 51
Plugging completed March 8 19 51
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? No

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 3398 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle	Water	3314	3398			
Lansing	Oil & Water	3086	3098	5 $\frac{1}{2}$ "	3396'	2820'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled Hole to 180' with mud. Put in rock bridge to 170'. Run 15 sacks cement. Put plugs and rock bridge on top of cement. Filled hole to 35' with mud. Put in rock bridge at 30'. Run 10 sax of cement.

RECEIVED
STATE CORPORATION COMMISSION

(If additional description is necessary, use BACK of this sheet) MAR 22 1951
Correspondence regarding this well should be addressed to Bishop Oil Company
Address 316 Brown Building, Wichita, Kansas CONSERVATION DIVISION
Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick
(employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Donald J. Lawless
316 Brown Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 21 st day of March, 19 51

My commission expires 2/27/51 Notary Public.

28-5091-s 8-50-10M

PLUGGING
FILE SEC. 25, T. 13, R. 15W
BOOK PAGE 66 LINE 39

BISHOP OIL COMPANY
 No. 1 Strecker
 S/2 NE NE Sec. 25-13-15W
 Russell County, Kansas
 Elev. 1876 DF 1878 KB
 (all measurements from top of KB @ 1878)

FORMATION	DEPTH
Surface soil, shells, & sand	0-240
Shale & shells	287
Shale & shells	402
Iron	427
Shale & shells	690
Red bed	750
Shale & shells	1395
Salt, shale & shells	1580
Lime & shale	1920
Shale with lime	1930
Lime	1950
Lime & shale	2055
Lime	2065
Shale	2105
Shale & lime	2512
Sandy lime	2520
Shale & lime	2635-2815
Lime & shale	3000
Lime	3170
Lime & iron	3190
Lime	3398
Total Depth	3398

Geologic Formation Tops:

Tarkio	2511 (-633)
Heebner	2992 (-1114)
Lansing	3045 (-1167)
Arbuckle	3312 (-1434)

RECEIVED
 MAR 14 1951
 CONSERVATION DIVISION
 WICHITA, KANSAS

STATE OF KANSAS)
 RUSSELL COUNTY) ss

I hereby certify that the above is a true and correct copy of the log of the Strecker No. 1, located in the Center of South /2 Northeast Quarter Northeast Quarter (C S/2 NE NE) of Section 25, Township 13, Range 15W, Russell County, Kansas.

PLUGGING
 FILE SEC. 25 T. 13 R. 15W
 BOOK PAGE 66 LINE 39

Donald I. Lawless
 Donald I. Lawless
 District Geologist
 Bishop Oil Company

Subscribed and sworn to before me this 13th day of March, 1951.


My Commission expires: 3/27/54

[Signature]
 Notary Public

**MATERIAL REPORT
AND
PLUGGING RECORD**

Mail To: STATE CORPORATION COMMISSION
Conservation Division
800 Bitting Building
Wichita, Kansas

NOTICE: All questions on this form must be answered.

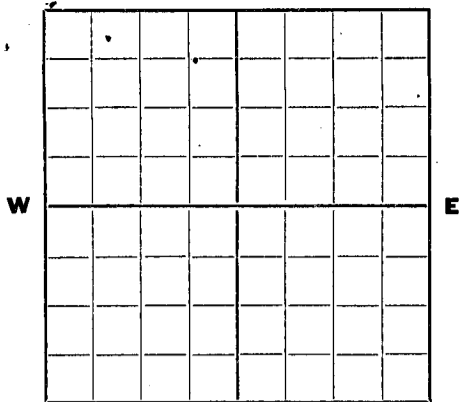

Locate well correctly.

Company Operating Bishop Oil Company

Office Address 316 Brown Bldg, Wichita, Kansas

County Russell Sec. 25 Twp. 13 Rge. 15W

Farm Name Strecker Well No. 1 Field Atherton

Well Location S¹/₂ NE NE

Name of Producing Sand Lansing-Kansas City Total Depth 3398

Commenced Plugging 3-9-51 Finished 3-9-51

DAILY AVERAGE PRODUCTION:

Initial Production: Oil 8 barrels Gas None Water 64 barrels

Production when Plugged: Oil 8 barrels Gas None Water 64 barrels

Estimated Total Remaining Reserves Attributable to Well at Time Abandoned

INFORMATION ON MATERIALS RECLAIMED FROM WELL

CASING, TUBING AND ROD DATA

Description	Size	Recovered		Junk		Reusable		Disposition Made Or To Be Made Of Usable Material
		Ft.	Tons	Ft.	Tons	Ft.	Tons	
Steel Seamless	5 1/2"	2800	21			2800	21	Returned to Chase yard

SURFACE EQUIPMENT

Quantity	Description	*Condition	Est. Tons	Disposition Made Or To Be Made Of Reclaimed Material

* Usable, Usable with minor repairs, or junk.

Date: March 13, 1951

Signed: Donald J. Lawrence
(For Operating Co. Title)
District Geologist

(See note on reverse side)

PLUGGING
FILE SEC 25 T 13 R 15W
BOOK PAGE 66 LINE 39

03-14-1951

It is very important that all questions on this form be answered, as this Department has been asked by the Petroleum Administration for War to supply data on well abandonments undertaken during the war.

This information is very essential in aiding the war effort; therefore, this Department is requiring this report to be mailed within 5 days after the abandonment of your well.