

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Russell County. Sec. 25 Twp. 13 Rge. 15 (E) W (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE NE SW  
Lease Owner Shields Oil Producers, Inc.  
Lease Name Neil Well No. 1  
Office Address Shields Building, Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed February 18 1962  
Application for plugging filed February 18 1962  
Application for plugging approved February 18 1962  
Plugging commenced February 18 1962  
Plugging completed February 18 1962  
Reason for abandonment of well or producing formation \_\_\_\_\_

NORTH

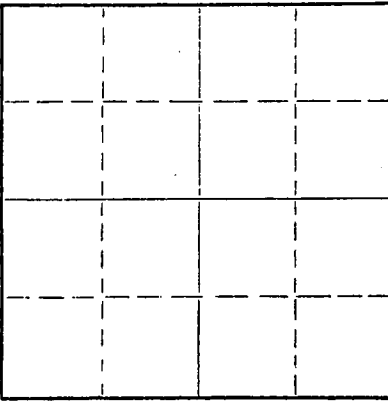

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3,330 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	247'	Cmtd w/ 175 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Fill w/ heavy mud to 240'  
Set bridging plug @240' w/ 1/4 sax hulls on plug  
Dump 25 sax cement on plug thru 4 1/2" drill pipe  
Fill w/ heavy mud to 40'  
Set bridging plug @40' w/ 1/2 sax hulls on plug  
Dump 10 sax cement on plug to cellar

RECEIVED  
STATE CORPORATION COMMISSION  
MARCH 19 1962  
03-08-1962  
CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.  
Address Shields Building

STATE OF Kansas, COUNTY OF Russell, ss.  
R. L. Shields (Employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R L Shields

Shields Building, Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of March, 19 62

My commission expires November 9, 1963

Delbert W. Beckler  
Notary Public





# Shields

15-167-03846-00-00


Russell, Kansas

## WELL LOG

Operator: Shields Oil Producers, Inc.  
 Well: Neil #1  
 Commenced: February 10, 1962  
 Completed: February 18, 1962  
 Contractor: Shields Drilling Co., Inc.

### Well Description

SE NE SW  
 Sec. 25-13S-15W  
 Russell County, Kansas



Elevation: 1,894' RB

Treatment:

Production: D & A

Tops: Topeka 2,771'  
 Heebner 2,999'  
 Toronto 3,018'  
 Lansing-KC 3,051'  
 Arbuckle 3,315'

### CASING RECORD

Size	Run	Pulled
8 5/8"	247'	Cmtd w/ 175 sax

..... Figures Indicate Bottom of Formations .....

Shale & shells	370'
Sand & iron pyrite	435'
Shale & shells	480'
Redbed	922'
Anhydrite	1,165'
Shale & shells	1,580'
Lime & shale	1,895'
Lime	2,120'
Shale & lime	2,895'
Lime	3,290'
Lime & shale	3,322'
Lime	3,330' RTD

### NOTES

DST #1	3,020'-3,035'	Tool open 30 min. Recovered 6' mud. FBHP-550#/20 min.
DST #2	3,067'-3,085'	Tool open 1 hr. Recovered 240' muddy water. FBHP-480#/20 min.
DST #3	3,089'-3,112'	Tool open 45 min. Recovered 70' muddy water. FBHP-370#/20 min.
DST #4	3,299'-3,322'	Tool open 30 min. Recovered 15' mud. FBHP-0#/20 min.
DST #5	3,322'-3,330'	Tool open 1 hr. Recovered 1,250' sulphur water. FBHP-980#/20 min.

**RECEIVED**  
 STATE CORPORATION COMMISSION

MAR 8 1962  
 03-08-1962  
 CONSERVATION DIVISION  
 Wichita Kansas