


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

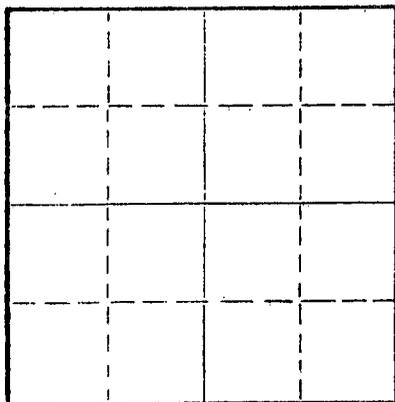

Locate well correctly on above
Section Plat

Russell County, Sec. 25 Twp. 13 Rge. 15 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NW SW SE

Lease Owner Barton Brothers Oil Co.

Lease Name Atherton Well No. 5

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed December 23, 19 68

Application for plugging filed December 23, 19 68

Application for plugging approved December 23, 19 68

Plugging commenced December 23, 19 68

Plugging completed December 23, 19 68

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan

Producing formation Depth to top Bottom Total Depth of Well 3, 328 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	240'	Cmtd. w/175 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill hole w/ heavy mud to 450'
 Set bridge plug @ 450'
 Spotted 40 sax cement on plug thru 4 1/2" drill pipe
 Fill hole w/ heavy mud to 240'
 Set bridge plug @ 240'
 Spotted 25 sax cement on plug thru 4 1/2" drill pipe
 Fill hole w/ heavy mud to 40'
 Set bridge plug @ 40' w/ 1/2 sax hulls on plug
 Dump 10 sax cement on plug to cellar

RECEIVED
 STATE CORPORATION COMMISSION
 FEB 19 1969
 CONSERVATION DIVISION
 Wichita, Kansas

02-19-1969

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.
Address Shields Bldg., Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss. R. J. Shields (employee of owner) or contractor of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) R. J. Shields

Shields Bldg., Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 18th day of February, 1969

My commission expires April 26, 1971

Notary Public.



15-167-20264-00-00

Operator:
Barton Oil Co.

Atherton

~~Strecker~~ Lease, well #5 SE $\frac{1}{4}$ Sec.25-13-15W NW SW SE
Russell County

Conytractor:
Shields Drilling Co.

Spudded: December 15, 1968
Completed: December 22, 1968

Elevation: 1890 RB

Production: Dry

Figures Indicate Bottom of Formation

155 Post rock, shale & sand
420 Shale, shells and pyrite
431 Pyrite
570 Sand and shale
650 Sand and shale
925 Red bed and shale
965 Anhydrite
1350 Shale
1475 Salt and shale
1575 Shale and lime shells
1875 Shale and lime streaks
2025 Lime
2150 Lime
2195 Lime and shale
2420 Lime with shale
2785 Lime with shale
2910 Topeka lime top 2769
3020 Lime
3030 Lime
3115 Lime
3240 Lime
3310 Lime
3328 Lime
3328 T.D.

RECEIVED
STATE CORPORATION COMMISSION
FEB 11 1969
CONSERVATION DIVISION
Wichita, Kansas

02-11-1969