

15-167-21320-00-00

WELL PLUGGING RECORD

Give All Information Completely  
 Make Required Affidavit

COUNTY Russell SEC. 25 TWP. 13 RGE. 15W E/W  
 Location as in quarters or footage from lines:

SW SW NE


Locate Well  
 correctly on above  
 Section Platt.

Lease Owner Petro-Lewis Corporation  
 Lease Name Strecker #1 Well No. \_\_\_\_\_  
 Office Address 3100 N. Main Great Bend, Kansas 67530  
 Character of Well (Completed as Oil, Gas or Dry Hole): \_\_\_\_\_  
 Date Well Completed \_\_\_\_\_  
 Application for plugging filed \_\_\_\_\_  
 Plugging commenced 6-22-82  
 Plugging completed 6-24-82  
 Reason for abandonment of well or producing formation \_\_\_\_\_

\_\_\_\_\_ Depleted  
 Was permission obtained from the Conservation Division or it's  
 Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Scheck

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ bottom T.D. 3354'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
				8-5/8"	958'	none
				5-1/2"	3354'	2328'


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged off bottom with sand to 3260' and ran 5 sacks cement. Shot casing @2720', 2619', 2521', 2421', and 2320'. Pulled a total of 74 joints of 5-1/2" casing. Plugged well with 3 sacks hulls, 12 sacks gel, 70 sacks cement, 1 sack hulls, 3 sacks gel, released plug and displaced with 70 sacks cement, 50/50 pos, 4% gel, 3% ec.

Plugging Complete.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Kelso Casing Pulling

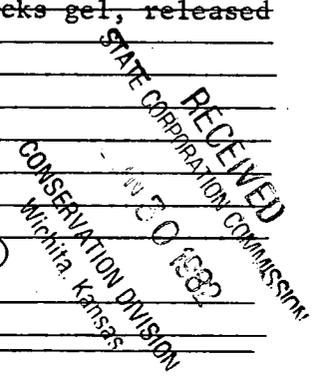


STATE OF Kansas COUNTY OF Rice, ss.

R. Darrell Kelso (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso  
 Bpx 347 Chase, Kansas 67524  
 (Address)

SUBSCRIBED AND SWORN TO before me this 28th day of June, 19 82

My Commission expires:



Irene S. Jones  
 Notary Public.