


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217

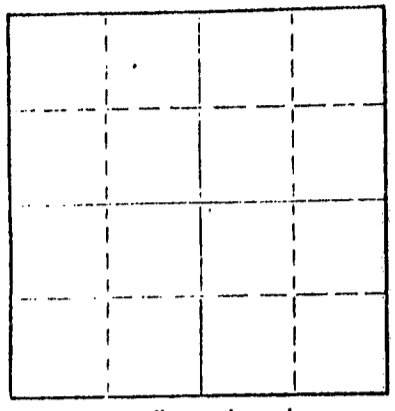

Locate well correctly on above  
Section Plat

Ellis County, Sec. 18 Twp. 11 Rge. 17W(E) (W)  
Location as "NE/CNW/SW" or footage from lines NW NW N2 N05W AUB KCC  
Lease Owner Clinton Oil Company  
Lease Name J. Husted #1 Well No. 1 AUB KCC  
Office Address Great Bend, Kansas 67530  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed 10-10 19 39  
Application for plugging filed 6-27 19 74  
Application for plugging approved 8-11 19 74  
Plugging commenced 8/16/74 19  
Plugging completed 8/21/74 19  
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production June 19 72  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes Massey

Name of Conservation Agent who supervised plugging of this well \_\_\_\_\_  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3438 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				15"	55'	none
				7"	3333'	2410'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole, pushed plug to 3359' with 10' sand and 5 sacks cement.  
Shot pipe at 2509', 2419', pulled 80 joints. Set rock bridge from 365'  
to 350' and dumped 9 yards ready mix.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION

SEP 24 1974

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING  
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.  
R. DARRELL KELSO (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledgo of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso

CHASE, KANSAS  
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of August, 19 74

Margaret Melcher  
Notary Public.



15-051-02213-002

THE DICKEY OIL COMPANY  
Husted Well No. 1

COMMENCED: 9/17/39  
COMPLETED: 10/10/39

LOCATION: Cen. N/2 NW/4 NW/4 18-11-17  
Ellis County, Kansas

Casing Record

ELEVATION: 1843

55' 15"  
1092' 10"  
3333 7"

sand	40
shale	55
red bed	80
shale and shells	400
sand	495
iron	505
shale and shells	610
water sand	725
red bed	1073
anhydrite	1115
shale and shells	1444
salt	1518
shale	1650
shale and lime	1708
shale and shells	1785
lime	1790
broken lime	2359
shale and shells	2481
broken lime	2525
shale and shells	2780
Top Topeka lime	2780
lime and shale	2853
broken lime	2910
lime	3037
broken lime	3050
Top K. C. lime	3050
lime	3300
shale and shells	3327
green shale	3332
Top Siliceous-Arbuckle	3332
Siliceous-Arbuckle	3336 T.D.

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 11 1974  
CONSERVATION DIVISION  
Wichita, Kansas

3332  
3332  
3332