


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

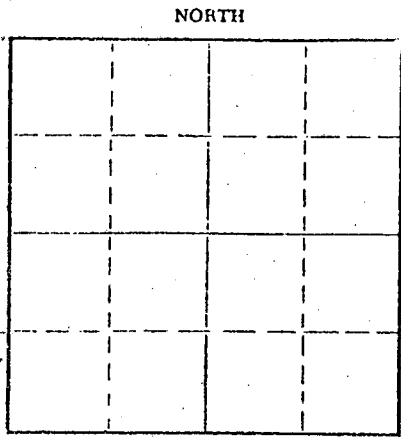

Harper County, Sec. 4 Twp. 35S Rge. (E) 9 (W)
Location as "NE/CNW/SE/SW" or footage from lines C NE NW
Lease Owner Anadarko Production Company
Lease Name Burke "A" Well No. 1
Office Address Box 351, Liberal, Kansas 67901
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 3-30 19 74
Application for plugging filed 3-30 19 74
Application for plugging approved 3-30 19 74
Plugging commenced 3-30 19 74
Plugging completed 3-30 19 74
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstein, Attica, Ks. 67009
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4790 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	330'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Spotted 40 sacks cement 300' to 200'. Spotted 15 sacks cement 40' to 0', 2 sacks in rat hole.

RECEIVED STATE CORPORATION COMMISSION
RECEIVED STATE CORPORATION COMMISSION
RECEIVED STATE CORPORATION COMMISSION
APR 19 1974
04-19-74
CONSERVATION DIVISION Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sweetman Drilling Company
Address Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEWARD, ss.
T. W. Williams (employee of owner) or (~~owner~~) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) T. W. Williams
Box 351, Liberal, Kansas 67901
(Address)

NORMA JEAN TUCKER
NOTARY PUBLIC
Seward County, Kansas
Subscribed and sworn to before me this _____ day of _____, 1974
September 9, 1976

My commission expires _____
Notary Public.

15-077-20246-0000

DRILLER'S LOG

WELL NAME Burke "A" #1 COMPANY OPERATING Anadarko Production Company
 ADDRESS OF COMPANY Box 351, Liberal, Ks. 67901
 WELL LOCATION NE $\frac{1}{4}$ NW $\frac{1}{4}$ $\frac{1}{4}$
Ft. North of South Line,
Ft. East of West Line, Sec. 4 , Twp. 35S , Rge. 9W , Harper County, Kansas

DRILLING STARTED 3-19 , 19 74 , DRILLING COMPLETED 3-30 , 19 74
 WELL COMPLETED 3-30 , 19 74 , WELL CONNECTED _____ , 19 _____

ELEVATION 1250 Ft. Ground Level CHARACTER of WELL (Oil, Gas, Dry Hole) Dry Hole

OIL OR GAS SANDS OR ZONES - PERFORATIONS - ACIDIZING AND FRACTURING INFORMATION					
Name	From	To	No. of Shots	Gallons Used	Kind Used

CASING RECORD

Size	Amount Set	Sacks of Cement	Amount Pulled
8-5/8"	330'	300	None

FORMATION RECORD

Formation	Top	Bottom	Formation	Top	Bottom
Soil, sand & red bed	0	40			
Red bed & shale	40	370			
Shale	370	1117			
Shale & lime	1117	3842			
Shale & sand	3842	3909			
Sand	3909	3950			
Shale & lime	3950	4145			
Lime	4145	4255			
Lime & shale	4255	4475			
Lime	4475	4790			
Total Depth	4790				

RECEIVED
 STATE CORPORATION COMMISSION
 APR 19 1974
 CONSERVATION DIVISION
 Wichita, Kansas

RESULTS OF INITIAL PRODUCTION TEST: _____

