


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

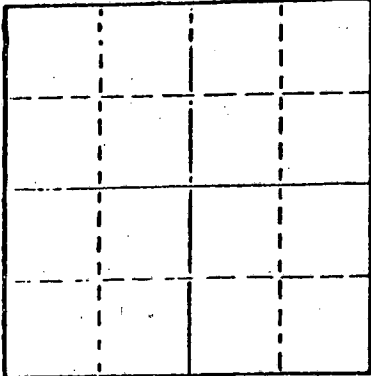

Locate well correctly on above Section Plot

Russell County. Sec. 28 Twp. 13 Rge. 15 E/W
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines _____
SE NE NW

Lease Owner V. Francis Weigel
Lease Name Lacey Well No. 2
Office Address Box 244, Gorham, Kansas 67640
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry hole

Date Well completed 2-8 1979
Application for plugging filed 2-8 1979
Application for plugging approved 2-8 1979
Plugging commenced 2-8 1979
Plugging completed 2-8 1979

Reason for abandonment of well or producing formation _____
Dry hole

If a producing well is abandoned, date of last production _____
19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,364'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	730'	Cmtd. w/350 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- Fill hole w/heavy mud
- Push bridge plug to 450'
- Spot 50 sax cement on plug thru 4 $\frac{1}{2}$ " drill pipe
- Push bridge plug to 40' w/ $\frac{1}{2}$ sax hulls on plug
- Dump 10 sax cement on plug to cellar.
- Dump 2 sax cement in rat hole
- Dump 2 sax cement in mouse hole

RECEIVED
STATE CORPORATION COMMISSION

FEB 27 1979

(If additional description is necessary, use BACK of this report)
Name of Plugging Contractor Shields Drilling Co., Inc.

Conservation Division
Wichita, Kansas

STATE OF KANSAS COUNTY OF RUSSELL, ss contractor
R.L. Shields (employee of owner) ~~owner~~ ~~operator~~
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R.L. Shields
Shields Bldg., Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of February, 1979

My commission expires May 26, 1979
Ruth Phillips
Notary Public.





Shields


15-167-21281-00-00

Russell, Kansas

WELL LOG

Operator: V. Francis Weigel
 Well: Lacey #2
 Commenced: January 31, 1979
 Completed: February 8, 1979
 Contractor: Shields Drilling Co., Inc.

Well Description: SE NE NW
 Sec. 28-13S-15W
 Russell Co., Kansas



CASING RECORD

Size	Run	Pulled
8 5/8"	730'	Cmtd. w/350 sax

Elevation:

Treatment:

Production: D & A

Tops:

..... Figures Indicate Bottom of Formations

Surface clay & post rock	60'	
Shale & sand	670'	
Redbed	958'	
Anhydrite	997'	
Shale	1,590'	
Lime & shale	2,830'	
Lime	3,364'	RTD

RECEIVED
 STATE CORPORATION COMMISSION

FEB 27 1979
 02-27-1979

CONSERVATION DIVISION
 Wichita, Kansas

Notes