

15-051-19341-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Ellis County, Sec. 19 Twp. 13 Rge. 16W (E) (W)
Location as "NE/CNW%SW%" or footage from lines _____
Lease Owner Jay Kornfeld
Lease Name Rome #1 Well No. _____
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 5/15/70 _____ 19____
Plugging completed 5/19/70 _____ 19____
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

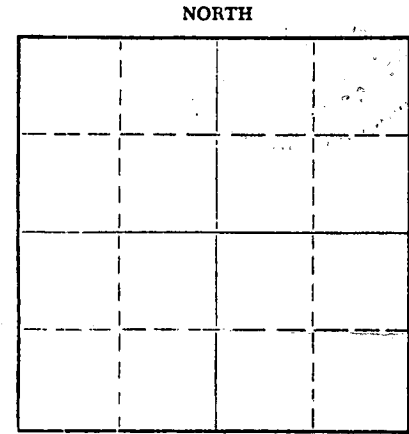

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3521 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	200'	none
				5 1/2"	3515'	2736

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole, sanded hole to 3250', checked sand, set 5 sacks of cement.
Shot pipe at 2840', 2747', pulled pipe. Pumped 5 sacks hulls, 20 sacks mud, 130 posmix, 6% gel. Moved off location.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
MAY 26 1970
CONSERVATION DIVISION
Wichita, Kansas
05-26-1970


Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss. NOEL J. KNIGHT

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

Subscribed and sworn to before me this 20th day of May, 1970



Margaret Melcher
Notary Public.

My commission expires 2/15/71

15-051-19341-00-00

RECEIVED
STATE CORPORATION COMMISSION
MAY 13 1970
CONSERVATION DIVISION
Wichita, Kansas

DRILLER'S LOG

COMPANY:	Jay Kornfeld
CONTRACTOR:	LEBEN DRILLING, INC.
FARM:	ROME #1
LOCATION:	NW SE SW Sec. 19-13S-16W
	ELLIS COUNTY, KANSAS
COMMENCED:	8-15-63
COMPLETED:	8-23-63

0	60	Clay & Post Rock
60	200	Sand, Shale, Shells
200	650	Shale
650	800	Sand, Shale
800	1121	Redbed
1121	1160	Anhydrite
1160	1360	Shale & Shells
1360	1785	Redbed, Shale, Shells
1785	1850	Shale, Shells
1850	2025	Shale, Lime
2025	3230	Lime, Shale
3230	3515	Lime
	<u>3515</u>	<u>Rotary Total Depth - Set 5 1/2" Casing</u>

(125 lbs Pozzist)

Set @ 5/8" used Surface Casing @ 200' Cemented with 165 sacks Sunset Cement.

I, Doug Boyd, do hereby certify that the above and foregoing is a true and correct copy of the log of the Rome #1, located NW SE SW of Section 9, Township 13 South, Range 16 West, Ellis County, Kansas, as reflected by the files of Leben Drilling, Inc.

Doug Boyd
Doug Boyd

STATE OF KANSAS)
) SS
COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 28th day of August, 1963.

Ulanda Nichols
Ulanda Nichols, Notary Public

My Commission Expires:
April 1, 1967