

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County, Sec. 19 Twp. 13 Rge. 16W (E) (W)

Location as "NE/CNW/SW" or footage from lines SW SW NE

Lease Owner Artnell Co.

Lease Name Rome "A" Well No. 1

Office Address Petroleum Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed July 2 1956

Application for plugging filed July 2 1956

Application for plugging approved July 2 1956

Plugging commenced July 2 1956


Plugging completed July 2 1956

Reason for abandonment of well or producing formation oil in commercial quantities not found

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

NORTH

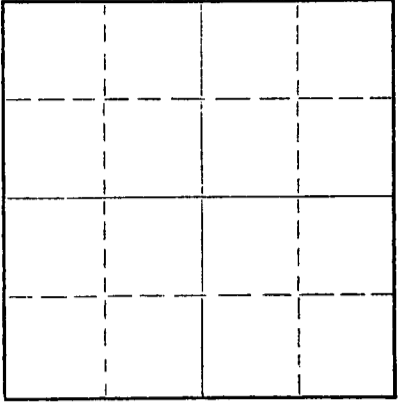

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3588' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	258'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with extra heavy rotary mud from total depth to 240'. Set #1 plug with 15 sacks cement, 1/2 sack hulls.
Filled hole with extra heavy rotary mud from 1st plug to 40'. Set #2 plug with 10 sacks cement, 1/2 sack Hulls.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Prime Drilling Company

Address 1005 Central Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF Sedgwick, ss.

L. J. Champitt (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
1005 Central Bldg., Wichita, Kansas
(Address)


SUBSCRIBED AND SWORN TO before me this 5th day of July, 19 56

My commission expires September 30, 1959

[Signature]
Notary Public.

PLUGGING
FILE SEC 19 T 13 R 16W
BOOK PAGE 77 LINE 20

07-06-1956



ROTARY DRILLING LOG

OPERATOR: Artnell Company
 Rome "A" #1
 SW SW NE Sec. 19-13-16W,
 Ellis County, Kansas

CONTRACTOR: Prime Drilling Company
 COMM: 6/19/56
 COMP: 7/2/56

Formations:

Clay & Post Rock	60'
Shale	258'
Shale & Shells	405'
Sand & Shale	590'
Shale & Shells	1130'
Anhydrite	1165'
Shale & Shell	1840'
Shale & Lime	3005'
Lime	3517'
Lime Shale Chert	3521'
Conglomerate	3561'
Conglomerate & Lime	3588'
Rotary Total Depth	3588'

Remarks: Set 258' of 8-5/8" surface casing cemented with 185 sacks Pozmix, 2% C.C.

We certify the above log is true and correct to the best of our knowledge and belief.

PRIME DRILLING COMPANY

R. R. McNicol

R. R. McNicol

