


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

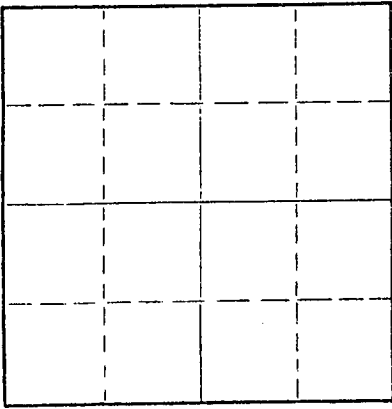

Locate well correctly on above
Section Plat

Ellis County. Sec. 8 Twp. 13S Rge. (E) 16 (W)
Location as "NE/CNW%SW%" or footage from lines S/2 S/2 NE/4
Lease Owner Thunderbird Drilling, Inc.
Lease Name Weigel Well No. 1-A
Office Address 400 N. Woodlawn, Suite 7, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed November 8, 1968
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced November 8, 1968
Plugging completed November 8, 1968
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (Leo Massey of Hays)

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 3517 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	230'	8-5/8"	10/30/68	----
	Casing					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy Mud from Total Depth to 600 Feet;
Plug and 70 sax Cement; Mud to 215 Feet;
Plug and 20 sax Cement; Mud to 40 Feet;
Plug and 40 sax Cement to Base of Cellar;
2 sax Cement in Rat Hole. Job Completed
@ 5:30 P.M. 11/8/68.

RECEIVED
STATE CORPORATION COMMISSION
NOV 13 1968
CONSERVATION DIVISION
Wichita, Kansas

11-13-1968

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Sage Drilling Co.
Address 500 Bitting Building, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Wayne W. Kahmeyer of Sage Drilling Co. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wayne W. Kahmeyer
500 Bitting Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of November, 1968
Louise K. Whitted - Notary Public.



My commission expires November 26, 1970.

15-051-20341-00-00

DRILLERS LOG

WEIGEL NO. 1 "A"

CASING RECORD:	OPERATOR: Thunderbird Drilling, Inc.	DESCRIPTION:
8-5/8" @ 230' w/175 sax cement	CONTRACTOR: Sage Drilling Co., Inc.	S/2 S/2 NE/4 Sec. 8-13S-16W Ellis Co., Kansas
TOTAL DEPTH: 3517'	COMMENCED: October 30, 1968	ELEVATION: 1980KB
	COMPLETED: November 8, 1968	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay & Shale	0	232	
Shale & Shells	232	670	
Sand	670	775	
Shale, Shells & Sand	775	1535	
Shale & Shells	1535	1800	
Shale & Lime	1800	1955	
Lime & Shale	1955	2508	
Shale & Lime	2508	3020	
Lime	3020	3282	
Lime & Shale	3282	3325	
Lime	3325	3480	
Conglomerate	3480	3489	
Arbuckle	3489	3517	D&A

RECEIVED
STATE CORPORATION COMMISSION
NOV 13 1968
CONSERVATION DIVISION
Wichita, Kansas
11-13-1968

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By Wayne W. Kahmeyer
Wayne W. Kahmeyer

Subscribed and sworn to before me this 12th day of November, 1968.



Louise K. Whitted
Louise K. Whitted, Notary Public

My commission expires:
November 26, 1970.