

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

Form CP-1
March 2010
This Form must be Typed
Form must be Signed
All blanks must be Filled

WELL PLUGGING APPLICATION

Form KSONA-1, Certification of Compliance with the Kansas Surface Owner Notification Act,
MUST be submitted with this form.

OPERATOR: License #: 5208
Name: Exxon Mobil Corporation
Address 1: PO Box 4358
Address 2: _____
City: Houston State: TX Zip: 77210 + _____
Contact Person: Richard Redus
Phone: (281) 654-1656

API No. 15 - 081-00264-0000
If pre 1967, supply original completion date: 7/27/1948
Spot Description: _____
NW NW SE Sec. 8 Twp. 28 S. R. 34 East West
2,640 Feet from North / South Line of Section
2,640 Feet from East / West Line of Section
Footages Calculated from Nearest Outside Section Corner:
 NE NW SE SW
County: Haskell
Lease Name: Goering Well #: 1

Check One: Oil Well Gas Well OG D&A Cathodic Water Supply Well Other: _____
 SWD Permit #: _____ ENHR Permit #: _____ Gas Storage Permit #: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks
Surface Casing Size: 10 3/4" Set at: 550' Cemented with: 350 Sacks
Production Casing Size: 7" Set at: 2561' Cemented with: 900 Sacks

List (ALL) Perforations and Bridge Plug Sets:
5 1/2" slotted liner @ 2548' - 2811'

Elevation: 3066 (G.L. / K.B.) T.D.: 2811' PBTD: 2811' Anhydrite Depth: _____
(Stone Corral Formation)

Condition of Well: Good Poor Junk in Hole Casing Leak at: 1428'
(interval)

Proposed Method of Plugging (attach a separate page if additional space is needed):
Please see attached. Well will be plugged in accordance with the rules and regulations of the KCC.

Is Well Log attached to this application? Yes No Is ACO-1 filed? Yes No
If ACO-1 not filed, explain why:

RECEIVED
DEC 09 2010

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.
Company Representative authorized to supervise plugging operations: Octavio Morales
Address: 200 W. 4th Street City: Hugoton State: KS Zip: 67951 + _____
Phone: (620) 356-7531
Plugging Contractor License #: 31151 Name: Sargent & Horton
Address 1: Rt. 1, Box 49 BA Address 2: _____
City: Tyrone State: KS Zip: 73951 + _____
Phone: (____) _____
Proposed Date of Plugging (if known): _____

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent
Date: 12/3/2010 Authorized Operator / Agent: Celleen Reda
(Signature)

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

Form KSONA-1
July 2010
Form Must Be Typed
Form must be Signed
All blanks must be Filled

**CERTIFICATION OF COMPLIANCE WITH THE
KANSAS SURFACE OWNER NOTIFICATION ACT**

This form must be submitted with all Forms C-1 (Notice of Intent to Drill); CB-1 (Cathodic Protection Borehole Intent); T-1 (Request for Change of Operator Transfer of Injection or Surface Pit Permit); and CP-1 (Well Plugging Application). Any such form submitted without an accompanying Form KSONA-1 will be returned.

Select the corresponding form being filed: C-1 (Intent) CB-1 (Cathodic Protection Borehole Intent) T-1 (Transfer) CP-1 (Plugging Application)

OPERATOR: License # 5208
Name: Exxon Mobil Corporation
Address 1: PO Box 4358
Address 2: _____
City: Houston State: TX Zip: 77210 + _____
Contact Person: Joseph Chevalier
Phone: (713) 431-1970 Fax: (713) 431-1540
Email Address: joseph.m.chevalier@exxonmobil.com

Well Location:
_____ NW _____ SE Sec. 8 Twp. 28 S. R. 34 East West
County: Haskell
Lease Name: Goering Well #: 1

If filing a Form T-1 for multiple wells on a lease, enter the legal description of the lease below:

Surface Owner Information:

Name: Sam J. & Ruth Kehn
Address 1: 1096 South Rd. S
Address 2: _____
City: Ulysses State: KS Zip: 67880 + _____

When filing a Form T-1 involving multiple surface owners, attach an additional sheet listing all of the information to the left for each surface owner. Surface owner information can be found in the records of the register of deeds for the county, and in the real estate property tax records of the county treasurer.

If this form is being submitted with a Form C-1 (Intent) or CB-1 (Cathodic Protection Borehole Intent), you must supply the surface owners and the KCC with a plat showing the predicted locations of lease roads, tank batteries, pipelines, and electrical lines. The locations shown on the plat are preliminary non-binding estimates. The locations may be entered on the Form C-1 plat, Form CB-1 plat, or a separate plat may be submitted.

Select one of the following:

- I certify that, pursuant to the Kansas Surface Owner Notice Act (House Bill 2032), I have provided the following to the surface owner(s) of the land upon which the subject well is or will be located: 1) a copy of the Form C-1, Form CB-1, Form T-1, or Form CP-1 that I am filing in connection with this form; 2) if the form being filed is a Form C-1 or Form CB-1, the plat(s) required by this form; and 3) my operator name, address, phone number, fax, and email address.
- I have not provided this information to the surface owner(s). I acknowledge that, because I have not provided this information, the KCC will be required to send this information to the surface owner(s). To mitigate the additional cost of the KCC performing this task, I acknowledge that I am being charged a \$30.00 handling fee, payable to the KCC, which is enclosed with this form.

If choosing the second option, submit payment of the \$30.00 handling fee with this form. If the fee is not received with this form, the KSONA-1 form and the associated Form C-1, Form CB-1, Form T-1, or Form CP-1 will be returned.

I hereby certify that the statements made herein are true and correct to the best of my knowledge and belief.

Date: 12/3/2010 Signature of Operator or Agent: Cellean Reda Title: Agent


RECEIVED
DEC 09 2010
KCC WICHITA

PRELIMINARY B&A SKETCH-PLUGS WILL CHANGE PER THE DIRECTIONS OF THE KCC DISTRICT REPRESENTATIVE

COMPANY: Exxon Mobil Corporation
 WELL NAME: Goering
 WELL #: 1
 API#: 15-081-00264
 COUNTY: Haskell

SURFACE CASING			
OD	WT / FT	GRADE	SET AT
10 3/4"	32.75		550'
PRODUCTION CASING			
OD	WT / FT	GRADE	SET AT
7"	20, 23		2561'
LINER			
OD	WT / FT	GRADE	SET AT
5 1/2"	15.5		2548' - 2811'
TUBING			
OD	WT / FT	GRADE	SET AT
NONE			

CAPACITIES (BBL/FT)	
2 3/8" TBG	0.00387
7" CSG	0.0404
2 3/8" x 7"	0.0350
10 3/4" CSG	0.1009
2 3/8"X10 3/4"	0.0954

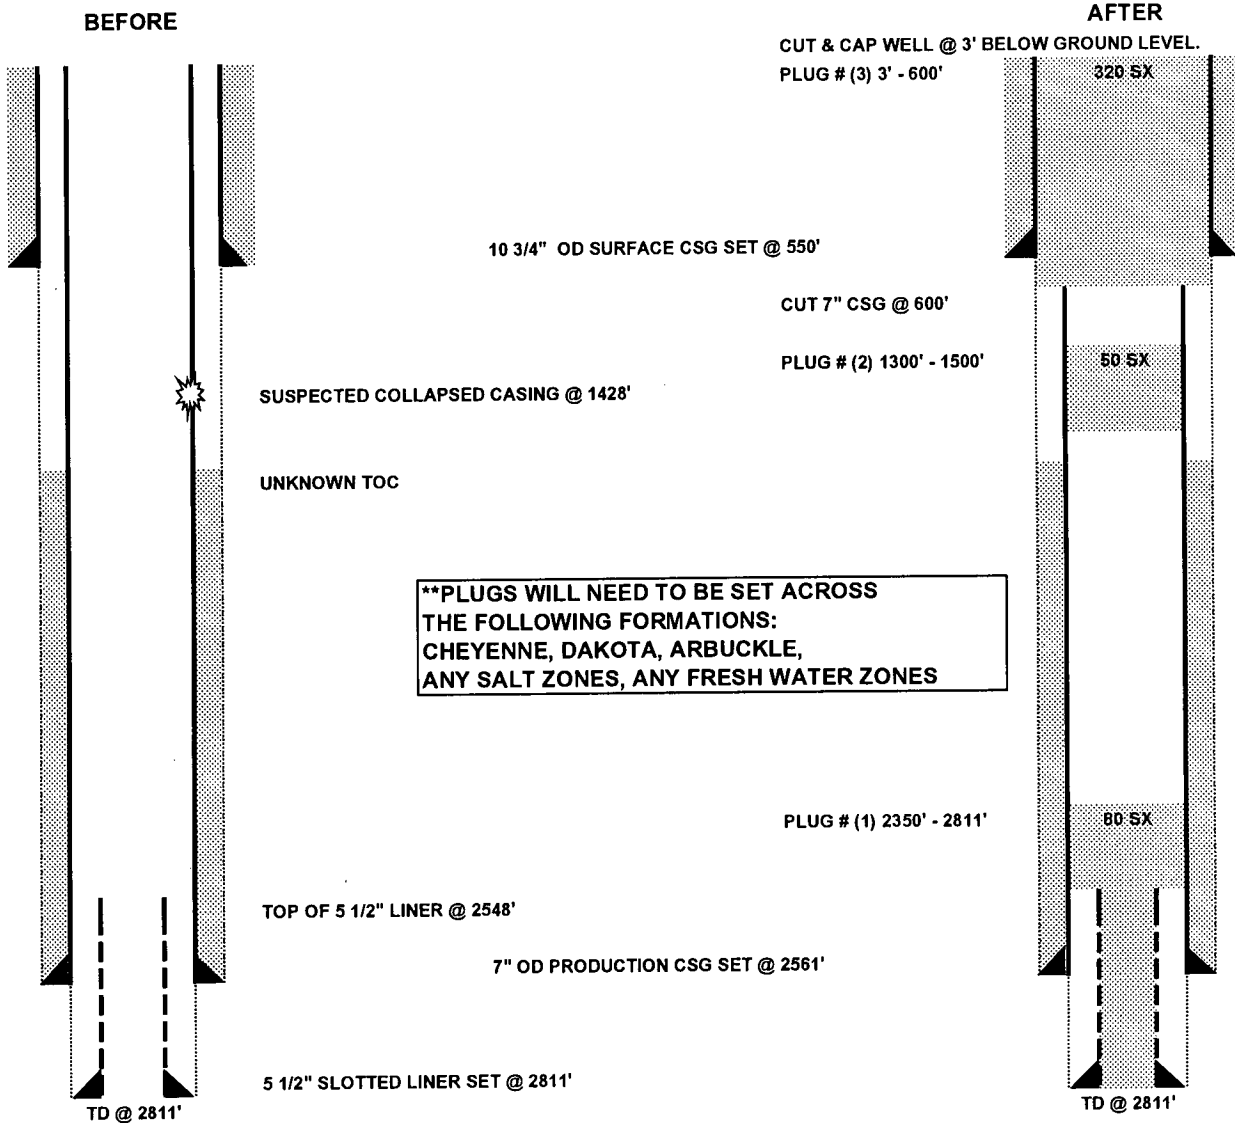

RECEIVED
 DEC 09 2010
 KCC WICHITA

PROPOSED PLUGGING PROCEDURE FOR EXXON MOBIL CORPORATION

WELL: GOERING # 1
FIELD: HUGOTON GAS AREA
COUNTY: HASKELL



THIS IS A CATEGORY ? WORKOVER.

NOTE: WELL HAS A POSSIBLE COLLAPSED CASING @ 1428'.

NOTE: PERFORM ALL WELL WORK OPERATIONS IN ACCORDANCE WITH THE HPO WORKOVER OPERATIONS MANUAL.

NOTE: USE CLASS 'H', 16.4 PPG, 1.06 YIELD CEMENT FOR ALL PLUGS.

NOTE: PUMP 9.5 PPG MUD LADEN FLUID BETWEEN CEMENT PLUGS.

NOTE: NOTIFY KCC DISTRICT OFFICE IN DODGE CITY, KS PRIOR TO COMMENCEMENT OF WORK & WITHIN SUFFICIENT TIME TO WITNESS PLUGGING OPERATIONS.

NOTE: ENSURE PLUGGING FORMS HAVE APPROPRIATE INFORMATION NEEDED TO FILE APPROPRIATE PAPERWORK W/ THE KCC TO CONCLUDE PLUGGING OPERATIONS.

Check pressures on all casing strings daily and document on morning reports. Discuss safe blow down/well kill procedures with Exxon Mobil Workover Supervisor.

1. INSPECT JOBSITE FOR POTENTIAL HAZARDS & LOCATION CHARACTERISTICS THAT MAY IMPACT THE PLANNED WELLWORK AND/OR REQUIRE MODIFICATION OF THE PROCEDURE. INITIATE MOC PROCESS IF NEEDED.
2. SET & TEST RIG ANCHORS AS NEEDED.
3. **PLUG WELL AS DIRECTED BY KCC DISTRICT REPRESENTATIVE.** A GENERAL PLAN IS AS FOLLOWS, BUT SHOULD BE REVISED TO ENSURE ALL FORMATIONS (INCLUDING THE CHEYENNE FORMATION, DAKOTA FORMATION, ARBUCKLE FORMATION, ANY SALT FORMATIONS & ANY FRESH & USABLE WATER ZONES) ARE ISOLATED AS PER THE SPECIFICATIONS OF THE KCC.
4. MIRU. LOAD WELL W/ FSW.
5. REMOVE TREE. INSTALL BOP'S (VERIFY BOP REQUIREMENTS) & TEST.
6. RIH W/ 2 3/8" WORKSTRING TO 2811'. (**NOTE: POSSIBLE COLLAPSED CASING @ 1428' & TOP OF 5 1/2" LINER @ 2548'. IF CAN NOT GET BELOW 1428', FOLLOW KCC REPRESENTATIVE DIRECTIONS TO REVISE P&A PROCEDURE AS NEEDED.**)
7. CIRCULATE 9.5 PPG MUD.
8. SET 80 SX CEMENT PLUG @ 2350' – 2811'.
9. POH W/ WORKSTRING TO 1500'. REVERSE OUT.
10. CIRCULATE & CONDITION MUD.
11. WOC. PRESSURE TEST CASING TO 500 PSI. **NOTE: IF CASING DOES NOT TEST DUE TO COLLAPSED CASING, LOWER WORKSTRING & TAG BOTTOM PLUG TO**

VERIFY PLUG INTEGRITY. FOLLOW THE DIECTIONS OF THE KCC TO ISOLATE LEAK.

12. SET 50 SX CEMENT PLUG @ 1300' – 1500'.
13. POH W/ WORKSTRING TO 500'. REVERSE OUT.
14. WOC. PRESSURE TEST CASING TO 500 PSI.
15. POH W/ WORKSTRING.
16. NIPPLE UP ON 7" CASING. RU JACKS.
17. SET BOP'S W/ 7" PIPE RAMS & TEST.
18. RU WL UNIT W/ CLASS II LUBRICATOR & TEST.
19. CUT 7" CASING @ 600'. RD WL UNIT.
20. CIRCULATE & CONDITION MUD.
21. RECOVER 7" CASING.
22. CHANGE BOP RAMS TO ACCOMADATE WORKSTRING.
23. RIH W/ WORKSTRING TO 600'.
24. SET 320 SX CEMENT PLUG @ 3' – 600'.
25. POH W/ WORKSTRING.
26. REMOVE BOP'S.
27. CUT & CAP WELL 3' BELOW GROUND LEVEL.
28. RD/MO.

12/03/10

RECEIVED
DEC 09 2010
KCC WICHITA



Mark Parkinson, Governor Thomas E. Wright, Chairman, Joseph F. Harkins, Commissioner, Ward Loyd, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

EXXONMOBIL OIL CORP
14950 HEATHROW FORREST PKWY
PO BOX 4358
HOUSTON, TX 77210-4358

December 10, 2010

Re: GOERING #1
API 15-081-00264-00-00
8-28S-34W, 2640 FSL 2640 FEL
HASKELL COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division has received your plugging proposal, form CP-1, for the above well and has reviewed the proposal for completeness. The central office will now forward your CP-1 to the district office listed below for review of the proposed plugging method. **Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113(b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit in accordance with K.A.R. 82-3-600.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well. This notice in no way constitutes authorization to plug the above well by persons not having legal rights of ownership or interest in the well.

This notice is void after June 8, 2011. The CP-1 filing does not bring the above well into compliance with K.A.R. 82-3-111 with regard to the Commission's temporary abandonment requirements.

Sincerely,

Steve Bond
Production Department Supervisor

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888