

WELL PLUGGING RECORD


STATE OF KANSAS STATE CORPORATION COMMISSION

Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 800 Bitting Building Wichita, Kansas

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations:

Ellis County. Sec. 1 Twp. 13S Rge. (E) 17 (W) Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SW 1/4, SW 1/4, SW 1/4 Lease Owner JONES, SHELburne & FARMER, INC. Lease Name GRAF Well No. 1 Office Address Russell, Kansas Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole Date well completed July 10 1949 Application for plugging filed July 10 1949 Application for plugging approved July 10 1949 Plugging commenced July 10 1949 Plugging completed July 11 1949 Reason for abandonment of well or producing formation Non-Productive If a producing well is abandoned, date of last production Never Produced 19 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

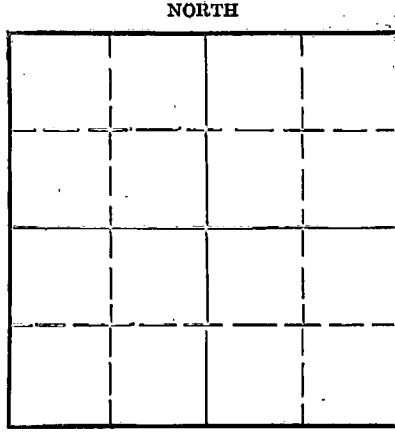

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Stough Producing formation None Depth to top Bottom Total Depth of Well 3750 Feet Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: Formation, Content, From, To, Size, Put In, Pulled Out. Row 1: Put In 290', Pulled Out None.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- 1. Heavy mud was mixed and the hole filled with same. 2. Wooden plug out and spotted at 285 feet. 3. Fifteen sacks of cement mixed and spotted on top of plug through drill pipe. 4. Hole filled to within 25 feet of top with heavy mud. 5. Plug spotted at 25 feet. 6. Ten sacks cement mixed and dumped into hole.

07-14-1949

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to JONES, SHELburne & FARMER, INC. Address Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.


John O. Farmer, Vice President (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) John O. Farmer Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 13 day of July, 1949

Phyllis Bohannon Notary Public

My commission expires June 3, 1953

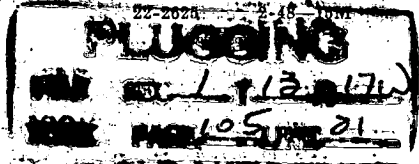

# Jones, Shelburne & Farmer, Inc.

Russell, Kansas

15-051-00697-00-00

## CONTRACTOR'S VERIFIED LOG

Operator JONES, SHELburne & FARMER, INC Farm Name GRAF Well No. 1  
 Location SW, SW, SW, Section 1-13-17  
 Pool Name WILDCAAT County ELLIS State KANSAS  
 Commencement Date 6/29/49 Completion Date 7/10/49

### Log of Well

Depth		Formation	Deviation from Vertical (Degrees)	Remarks
From	To			
0	290	Surface soil, sand, shale & shells		
290	530	Shale		
530	1055	Shale and sand		
1055	1215	Shale and shells		
1215	1245	Anhydrite		
1245	1520	Shale and shells		
1520	1860	Salt and shale		
1860	1985	Shale and shells		
1985	3210	Lime and shale		
3210	3325	Lime		
3325	3370	Lime and shale		
3370	3750	Lime		
	3750	Total Depth		

*RECEIVED*  
 07-14-1949

**PLUGGING**  
 SEC 1 T. 13 R. 17 W  
 PAGE 105 LINE 21

