


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
111 No. Broadway
Wichita, Kansas

15-051-61482-00-00
WELL PLUGGING RECORD



Locate well correctly on above
Section Plat

Ellis County, Sec. 8 Twp. 13 Rge. 17W(E) (W)
Location as "NE/CNW/SW" or footage from lines SE SE NW
Lease Owner Raymond Oil Company, Inc.
Lease Name POLJEKA Well No. 1
Office Address 410 Fourth National Bank Building, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 7, 19 63
Application for plugging filed January 7, (Verbal) 19 63
Application for plugging approved January 7, (Verbal) 19 63
Plugging commenced January 7, 19 63
Plugging completed January 7, 19 63
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty, Hays, Kansas
Producing formation Depth to top Bottom Total Depth of Well 3631 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	184'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used
in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Set plug @450' w/20 Sx. cement.
Fill hole to 180', set plug w/20 Sx. cement.
Fill hole to 40' w/1/2 Sx. hulls and 10 Sx. cement.
Plug through drill pipe.

RECEIVED
STATE CORPORATION COMMISSION

JAN 23 1963

01-23-1963
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Raymond Oil Company, Inc.
Address 410 Fourth National Bank Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Patrick R. Raymond (employee of owner) or (owner or operator) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
410 Fourth National Bank Building
(Address)

SUBSCRIBED AND SWORN to before me this 22nd day of January, 19 63

My commission expires July 9, 1966

[Signature]
Notary Public.

15-051-01482-00-00

RAYMOND OIL COMPANY, INC.
No. 1 POLIFKA
SE/4 SE/4 NW/4 Sec. 8-13-17W
Ellis County, Kansas

ELEVATION: 2008 GL
2010 DF
3013 RB

Contractor: Raymond Drilling Company - Rig #8
Commenced: December 30, 1962
Completed: January 7, 1963

Casing Record:
8-5/8" @ 184' w/ 140 sx.

Figures Indicate Bottom of Formation

<u>Formation</u>	<u>Depth</u>
Surface	184
Shale	525
Sand	875
Redbed & Shale	1253
Lime	1300
Shale	1875
Shale & Lime	2149
Lime & Shale	2310
Shale & Lime	2440
Shale w/Lime Streaks	2619
Lime & Shale	2765
Shale	3025
Shale & Lime	3128
Lime	3631 TD

Tops


Dakota Sand	525
Anhydrite	1253
Ft. Riley	1905
Topeka	3030
Heebner	3277
Toronto	3299
Lansing	3324
Base Kansas City	3552
Conglomerate	3570
Arbuckle	3580
Rotary Total Depth	3631

RECEIVED
STATE CORPORATION COMMISSION

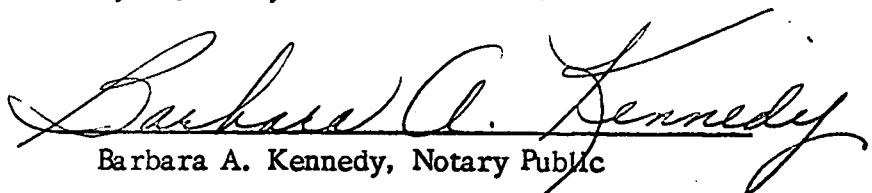
JAN 23 1963
01-23-1963
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) SS.
COUNTY OF SEDGWICK)

I hereby certify the above to be true and correct to the best of my knowledge.


Patrick R. Raymond, Vice-President

Subscribed and sworn to before me this 21st day of January, 1963.


Barbara A. Kennedy, Notary Public

My commission expires July 9, 1966.