


15-051-04156-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

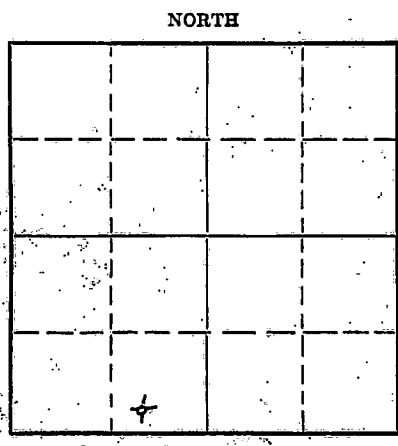

Locate well correctly on above
Section Plat

Ellis County, Sec. 11 Twp 13S Rge 17 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SW/4 SE/4 SW/4
Lease Owner Anderson-Prichard Oil Corp.
Lease Name Drilling Well No. 2
Office Address 1000 Apco Tower, Oklahoma City, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed Feb. 28 19 52
Application for plugging filed Feb. 28 19 52
Application for plugging approved Feb. 28 19 52
Plugging commenced Feb. 28 19 52
Plugging completed Feb. 28 19 52
Reason for abandonment of well or producing formation Dry Hole
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 3638 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled-Out
		0	242'	8 5/8"	242'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

3638' - 231 1/2' - Heavy Rotary Mud
231 1/2' - 230' - Halliburton Plug
230' - 184' - 15 sacks cement
184' - 41 1/2' - Heavy Rotary Mud
41 1/2' - 40' - Halliburton Plug
40' - 6' - 10 sacks cement
6' - Surface - Cellar

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Glenn W. Peel
Address P. O. Box 359
Hoisington, Kansas

03-06-1952

STATE OF Kansas, COUNTY OF Barton, ss.
Glenn W. Peel (employee of owner) or (owner) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) BY: Glenn W. Peel
P. O. BOX 359, Hoisington, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 29th day of February, 1952

Marian M. Herbert
Notary Public.

My commission expires June 4, 1955

23-8390-s 6-51-20M

PLUGGING
FILE SEC 11 T 13 R 7W
BOOK PAGE 149 LINE 7

15-051-04156-00-00

DRILLER'S LOG

Company: Anderson-Prichard Oil Corp.

SW/4 SE/4 SW/4
Sec. 11 Twp. 13S, Rge. 17W

Farm: Dreiling Well No. 2
Total Depth: 3638'

County: Ellis,
Kansas

Comm: 2-18-52 Comp: 2-28-52
Contractor: Glenn W. Peel

Elevation:

Casing: 8 5/8" 242' cem.

Production: Dry

Figures below indicate bottom of formations

Surface Clay	0 -	40
Sand & Shale		70
Shale & Shells		240
Shale		450
Red Bed & Shells		520
Shale & Shells		755
Sand & Red Bed		860
Shale		1205
Anhydrite		1245
Shale & Shells		1890
Shale w/ lime streaks		1930
Lime & Shale		2955
Lime		3225
Lime & Conglomerate		3585
Conglomerate		3588
Arbuckle		3638
Total Depth		3638

This is to certify that the above information is to the best of my knowledge true and correct.

GLENN W. PEEL

BY: Way Herbert

SUBSCRIBED AND SWORN to before me this 29th day of February, 1952.

My commission expires June 4, 1955

Marion M. Herbert
Notary Public

1952
03-06-1952
Notary Public, Kansas

