

15-051-01584-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Ellis County, Sec. 19 Twp. 13s. Rge. (X) 17 (W)
Location as "NE/CNW/SW" or footage from lines SW/SE/SW
Lease Owner Clinton Oil Company
Lease Name Madden Well No. 1
Office Address 217 North Water, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed December 29 19 62
Application for plugging filed March 7 19 72
Application for plugging approved March 8 19 72
Plugging commenced March 10 19 72
Plugging completed March 10 19 72
Reason for abandonment of well or producing formation depleted

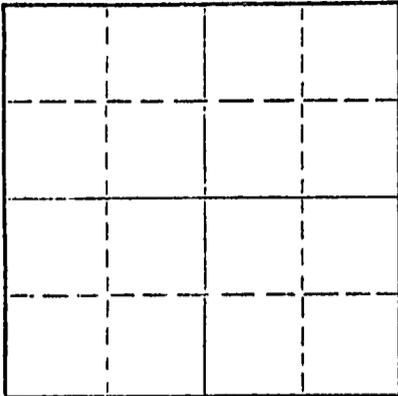

Locate well correctly on above
Section Plot

If a producing well is abandoned, date of last production March 4 19 72
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Lansing - KC Depth to top 3398 Bottom 3630 Total Depth of Well 3734 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	170'	None
				5 1/2	3627'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set btm plug 3440' - 3280' w/8 sx hulls, 55 sx gels, & 20 sx 50-50 poz. Top plug 500 - surf w/50 sx 50-50 gel.

RECEIVED
STATE CORPORATION COMMISSION

APR 3 - 1972

CONSERVATION DIVISION
Wichita, Kansas

04-03-1972

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Brown Bros. Well Service
Address Drawer 368 Plainville, Kansas 67663

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Ronald E. Rowe (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ronald E. Rowe Ronald E. Rowe
217 North Water, Wichita, Kansas 67202
(Address)

Subscribed and sworn to before me this 31st day of March, 19 72

My commission expires January 24, 1976



Allen J. Denton
Notary Public.

15-051 - 01584-00-00

RAYMOND OIL COMPANY, INC.
No. 1 MADDEN
SW/4 SE/4 SW/4 Sec. 19-13S-17W
Ellis County, Kansas

ELEVATION: 2095 GL
2097 DF
2100 KB

Contractor: Raymond Drilling Company - Rig #8
Commenced: December 18, 1962
Completed: December 29, 1962

Casing Record:
8-5/8" @ 170'/125 sx
5-1/2" @ 3615'

Figures Indicate Bottom of Formation

<u>Formation</u>	<u>Depth</u>
Soil	170
Shale	390
Sand	575
Shale	800
Sand	995
Shale	1050
Shale & Red Bed	1333
Anhydrite	1378
Shale	1520
Shale & Lime	2349
Lime	2448
Shale	2650
Shale w/Lime Streaks	2835
Lime & Shale	2977
Shale & Lime	3235
Lime	3288
Lime & Shale	3435
Lime	3735 TD

RECEIVED
STATE CORPORATION COMMISSION
MAR 8 1972
CONSERVATION DIVISION
Wichita, Kansas

03-08-1972

Tops


Anhydrite	1331
Topeka	3089
Heebner	3350
Toronto	3370
Lansing-Kansas City	3398
Base-Kansas City	3630
Conglomerate	3640
Total Depth	3734

STATE OF KANSAS)
) SS.
COUNTY OF SEDGWICK)

I hereby certify the above to be true and correct to the best of my knowledge.


Patrick R. Raymond, Vice-President

Subscribed and sworn to before me this 21st day of January, 1963.


Barbara A. Kennedy, Notary Public

My commission expires July 9, 1966.