

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Sedgwick County. Sec. 24 Twp. 13S Rge. 17W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
SW SW NW


Lease Owner Pate-Dombaugh Petroleum & Martin Explorations
Lease Name Kuhn Well No. 1
Office Address 502 Union Center, Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

Date Well completed July 7 1978
Application for plugging filed July 7 1978
Application for plugging approved July 7 1978
Plugging commenced July 7 1978
Plugging completed July 7 1978
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation Depth to top Bottom Total Depth of Well 3570
Show depth and thickness of all water, oil and gas formations.

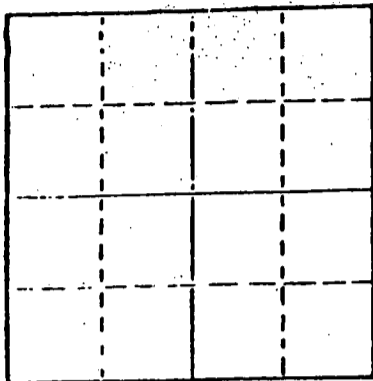

Locate well correctly on above Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	209'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged with 50 sx cement @ 500', 25 sx @ 185', bridge to hold kelly @ 40' with 10 sx cement. 2 sx cement rathole.

JUL 13 1978

07.13.1978

Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor B & B Drilling, Inc.
515 Union Center, Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Bill Lahar (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill Lahar
515 Union Center, Wichita, Kansas

SUBSCRIBED AND SWORN TO before me this 10 day of July, 1978



My commission expires January 22, 1979

Betty M. Abbott Notary Public.
CONSERVATION DIVISION
Wichita, Kansas

15-051-21509-00-00

July 10, 1978

DRILLERS LOG

#1 KUHN
SW SW NW
Sec. 24-13S-17W
Ellis County, Kansas

OPERATOR: Pate-Dombaugh Petroleum & Martin Explorations
CONTRACTOR: B & B Drilling, Inc.
COMMENCED: June 30, 1978
COMPLETED: July 7, 1978

8 5/8" @ 209' w/150 sx

0	210	Surface
210	1170	Shale
1170	1213	Anhydrite
1213	2565	Shale
2565	2755	Shale & Lime
2755	2900	Shale
2900	3060	Shale & Lime
3060	3570	Lime
3570		RTD

D & A

RECEIVED
STATE COMMISSION

JUL 13 1978
07-13-1978
CONSERVATION DIVISION
Wichita, Kansas

We certify that the above and foregoing is a true and correct copy of the log on the #1 Kuhn located in Ellis County, Kansas.

B & B DRILLING, INC.

Bill Lahar

Bill Lahar

Subscribed and sworn to before me this 10th day of July, 1978.

Betty M. Abbott
Betty M. Abbott Notary Public

My Commission Expires
January 22, 1979

