


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217

WELL PLUGGING RECORD

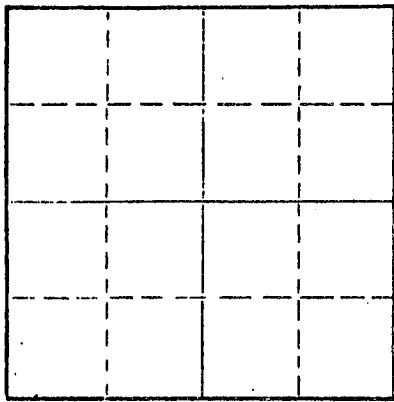

Locate well correctly on above  
Section Plat

Ellis County, Sec. 22 Twp. 11 Rge. 17 (E) (W)  
Location as "NE/CNW/SW" or footage from lines SE NE NW  
Lease Owner Ormand Industries  
Lease Name Bemis A# 6A Well No.  
Office Address Plainville, Kansas 67663  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 7/11/73 19  
Plugging completed 7/13/73 19  
Reason for abandonment of well or producing formation depleted.  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey  
Producing formation Depth to top Bottom Total Depth of Well 3457 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				15 1/2	34'	none
				10-3/4	1157'	none
				7"	3450'	1447'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, found bridge at 630', rigged up over 7" casing.  
Pushed bridge to 1475', shot pipe at 1451' and pulled 47 joints.  
Bailed fluid to 425', set rock bridge and dumped 8 yards ready mix.

PLUGGING COMPLETE.


RECEIVED STATE CORPORATION COMMISSION JUL 18 1973  
RECEIVED CONSERVATION DIVISION 07-18-73  
STATE CORPORATION COMMISSION Wichita, Kansas  
JUL 23 1973 07-23-73  
CONSERVATION DIVISION Wichita, Kansas

Name of Plugging Contractor KHELSO CASING PULLING  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
R. DARRELL KELSO (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R Darrell Kelso  
CHASE, KANSAS

SUBSCRIBED AND SWORN TO before me this 16th day of July, 1973



(Address) Margaret Melcher  
Notary Public.

BEMIS A - 6

SE NE NW 22-11-17W  
Ellis County, Kansas

15-051-03358-0001

Surface	0 - 32
Shale & shells	32 - 140
Shale, shells, red bed & iron	140 - 539
Red bed, shale & shells	539 - 612
Iron	612 - 627
Iron, shale & shells	627 - 675
Sand	675 - 790
Shale & shells	790 - 850
Red bed	850 - 910
Red bed & iron	910 - 1111
Shale	1111 - 1152
Anhydrite	1152 - 1190
Red bed	1190 - 1200
Anhydrite, red bed, & sand	1200 - 1406
Sandy shale	1406 - 1420
Salt	1420 - 1685
Shale	1685 - 1740
Broken lime & shale	1740 - 1930
Lime & shale	1930 - 2142
Lime	2142 - 2320
Broken lime & shale	2320 - 2377
Broken lime, shale & red bed	2377 - 2432
Broken lime	2432 - 2470
Lime & shale	2470 - 2890
Lime	2890 - 3435
Shale & lime	3435 - 3442
Sand	3442 - 3449
Siliceous lime	3449 - 3457

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 18 1969  
CONSERVATION DIVISION  
Wichita, Kansas



