

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Hamilton County. Sec. 17 Twp. 22 Rge. 40W E/W  
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines \_\_\_\_\_  
C/NW/SE

Lease Owner Ladd Petroleum Corporation  
Lease Name HCU Well No. 1720-B  
Office Address Box 520, Great Bend, KS 67530  
Character of Well (Completed as Oil, Gas or Dry Hole) \_\_\_\_\_


OIL GAS WATER  
Date Well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced October 18 \_\_\_\_\_ 1980  
Plugging completed October 29 \_\_\_\_\_ 1980  
Reason for abandonment of well or producing formation \_\_\_\_\_

Depleted  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas, Jr.  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2728'

Show depth and thickness of all water, oil and gas formations.

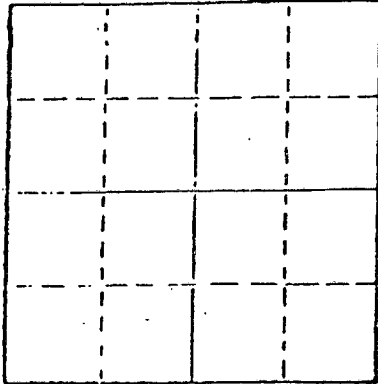

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	200'	None
				4 1/2"	2728'	1957.44'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Dumped sand to 2625' and 4 sacks cement  
Shot pipe at 2300' and 2150'. Pulled 35 joints of 4 1/2" casing.  
Shot pipe at 900' and 800'. Pulled total of 61 joints of 4 1/2" casing.  
Halliburton plugged well with 50 sacks cement at 250' and 10 sacks cement from 40' to surface.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.

STATE OF Kansas COUNTY OF Barton, ss.  
James W. Rockhold (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold  
James W. Rockhold, Box 698, Great Bend,  
(Address) KS 67530

SUBSCRIBED AND SWORN TO before me this 3rd day of December, 19 80

Ruth L. Sloan  
Ruth L. Sloan Notary Public.

My Commission expires September 27, 1981



RECEIVED  
STATE CORPORATION COMMISSION

DEC - 5 1980

CONSERVATION DIVISION  
Wichita, Kansas

LEASE: UNIT NO. 1720  
 OWNER: LIVINGSTON OIL COMPANY  
 CONTRACTOR: EARL F. WAKEFIELD  
 CORR: 10-29-63  
 COMP: 11-1-63

LOCATION: C NW SE  
 SECTION 17-22S-40W  
 HAMILTON COUNTY, KANSAS  
 CASING: 8 5/8" Set at 199'  
 4 1/2" Set at 2728'

Surface Soil	20
Sand	70
Sandy Clay	190
Blue Shale	203
Shale and Shells	880
Sand and Shale	945
Shale and Shells	1110
Shale	1234
Anhydrite	1243
Shale	1510
Shale and Shells	1691
Salt and Shale	1943
Shale and Red Beds	2200
Shale and Shells	2246
Anhydrite	2263
Shale and Shells	2350
Shale and Red Beds, Linc	2523
Red Bed, Shale and Linc	2650
Linc and Shale	2728
B.T.D.	2728

STATE OF KANSAS }  
 COUNTY OF SEDGWICK } SS

I hereby certify that the above is a true and correct copy of the log on the UNIT NO. 1720 well, located C NW SE of Section 17-22S-40W, Hamilton County, Kansas.

EARL F. WAKEFIELD

By Earl F. Wakefield

Subscribed and sworn before me this 5th day of November, 1963.

My commission expires:  
January 25, 1965

Wanda W. Hiley  
 WANDA W. HILEY NOTARY PUBLIC

RECEIVED  
 STATE CORPORATION COMMISSION

APR 17 1980