


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 200 Colorado Derby Bldg.
 Wichita, Kansas 67202

Form CP-4
 Rev. 12-15-80

15:05:23+78:00:00
 WELL PLUGGING RECORD

Give All Information Completely
 Make Required Affidavit

COUNTY Ellis SEC. 27 TWP. 13S RGE. 18W EAXX
 Location as in quarters or footage from lines:
N/2 N/2 NW

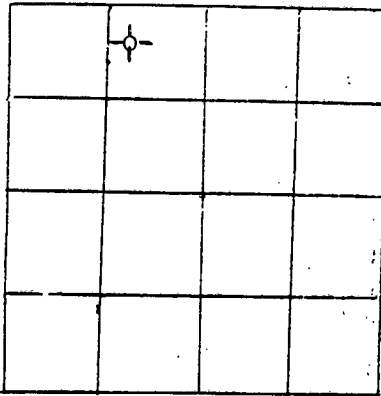

Locate Well
 correctly on above
 Section Platt.

Lease Owner Energy Reserves Group, Inc.
 Lease Name Luecke Well No. 1
 Office Address 925 Patton Road, Great Bend, Kansas 67530
 Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole
 Date Well Completed 6/2/83
 Application for plugging filed 6/2/83
 Plugging commenced 6/2/83
 Plugging completed 6/2/83 7:15 p.m.
 Reason for abandonment of well or producing formation Non-Commercial

Was permission obtained from the Conservation Division or it's
 Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt

Producing formation _____ Depth to top _____ bottom T.D. 3701

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
	Surf. Casing	0	418	8-5/8"	yes	no

Describe in detail the manner in which the well was plugged, indicating where the mud
 fluid was placed and the method or methods used in introducing it into the hold. If cement
 or other plugs were used, state the character of same and depth placed, from _____ feet
 to _____ feet for each plug set.

1st plug @ 1380' with 25 sacks 50/50 Poz, 4% gel, 3% CC
 2nd plug @ 690' with 80 sacks 50/50 Poz, 4% gel, 3% CC
 3rd plug @ 450' with 50 sacks " " " "
 4th plug @ 240' with 40 sacks " " " "
 Bridge plug @ 40' with 10 sacks " " " "
 10 sacks in rat hole
 Job complete @ 7:15 p.m. 6/2/83


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton

STATE OF Kansas COUNTY OF Barton, ss.

Jim W. Sullivan (employee of owner) or (owner or operator) of the
 above-described well, being first duly sworn on oath, says: That I have knowledge of the
 facts, statements, and matters herein contained and the log of the above-described well as
 filed and that the same are true and correct. So help me God.

(Signature) Jim W. Sullivan
925 Patton Rd, Great Bend, KS 67530
 (Address)



SUBSCRIBED AND SWORN TO before me this 20th day of June, 19 83

Ronald E. Rowe
 Notary Public.

My Commission expires: My Appointment Expires Sept. 9, 1983

RECEIVED
 STATE CORPORATION COMMISSION

JUN 24 1983
 624-83
 CONSERVATION DIVISION
 Wichita, Kansas