


STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 CONSERVATION DIVISION  
 P. O. BOX 17027  
 WICHITA, KANSAS 67217

15.051.21017.00.00  
**WELL PLUGGING RECORD**

FORM CP-4

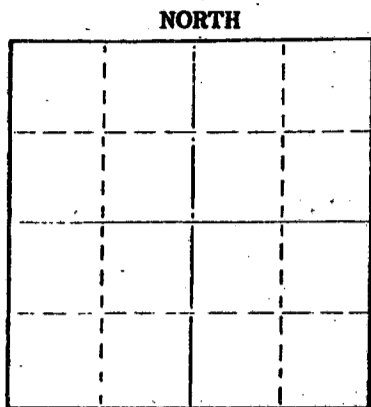

Locate well correctly on above Section Plat

Ellis County, Sec. 25 Twp. 13 Rgs. 19 (E) (W) X  
 Location as "NE/CNW/SE/SW" or footage from lines NE NW NW  
 Lease Owner H. A. Chapman  
 Lease Name Pete-Sack Well No. #1  
 Office Address Box 65 Great Bend, Kansas  
 Character of Well (completed as Oil, Gas or Dry Hole)  
 Date well completed 19  
 Application for plugging filed 19  
 Application for plugging approved 19  
 Plugging commenced 10-27-75 19  
 Plugging completed 10-29-75 19  
 Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo Massey  
 Producing formation Depth to top Bottom Total Depth of Well 3700' Feet  
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3698'	2838.22'
				8 5/8"	363'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mixed and ran 3 sacks cement thru dump bailer on plug at 3230'  
 Squeezed hole with 25 sacks gel. Released plug and displaced with 140 sacks cement.

RECEIVED  
 STATE CORPORATION COMMISSION

OCT 31 1975  
 10-31-75

(If additional description is necessary, use BACK of this sheet)  
 Name of Plugging Contractor Southwest Casing Pulling Co.  
 Address Box 364 Great Bend, Kansas

CONSERVATION DIVISION  
 WICHITA, KANSAS

STATE OF Kansas COUNTY OF Barton

Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec  
 Box 364 Great Bend, Kansas

Sworn to before me this 30 day of October 1975



Sidney D. Miller  
 Notary Public

DRILLERS' WELL LOG

15051-21017-00-00

DATE COMMENCED: September 29, 1975  
DATE COMPLETED: October 7, 1975

H. A. Chapman Investments  
PIERCE SACK # 1  
NE NW NW  
Sec. 25-T13S-R19W  
Ellis County, Kansas

ELEVATION: 2030 K.B.

0 - 120'	Shale
120 - 1050'	Shale, Clay, Sand Streaks
1050 - 1320'	Red Bed and Shale
1320 - 1362'	Anhydrite
1362 - 3295'	Shale and Lime
3295 - 3299'	Shale
3299 - 3315'	Shale and Lime
3315 - 3588'	Lime
3588 - 3611'	Lime and Shale
3611 - 3638'	Conglomerate - Shale
3638 - 3700'	Conglomerate - Chert
3700'	RTD

FORMATION DATA

Anhydrite	1320'
Topeka	3052'
Heebner	3295'
Toronto	3315'
Lansing	3340'
Base K.C.	3588'
Cong-Shale	3611'
Cong-Chert	3638'
RTD	3700'

SURFACE PIPE:

Set 363' of 8 5/8", 20# used pipe w/225 sacks 50/50 Pozmix, 2% Gel, 3/4 cc.

PRODUCTION PIPE:

Ran new 4 1/2", 10.5# casing @ 3698' w/200 sacks 50/50 Pozmix, w/CFR2 and 18% S.S.

A F F I D A V I T

STATE OF KANSAS }  
COUNTY OF BARTON } ss.

Wayne Dobbs, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Wayne Dobbs

Subscribed and sworn to before me this 9th day of October, 1975.



Douglas M. Hague  
Notary Public

My Commission Expires: April 11, 1978