


WELL PLUGGING RECORD

STATE OF KANSAS STATE CORPORATION COMMISSION Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 800 Biting Building Wichita, Kansas

Ellis County, Sec. 13 Twp. 13 Rge. 20 KEK (W)

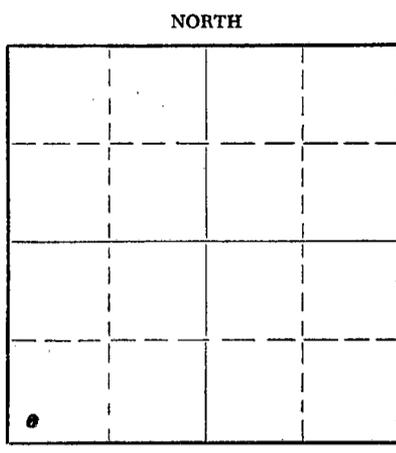

Location as "NE/CNW/SW" or footage from lines SW SW SW Lease Owner Braden Drilling Co. Lease Name Gerken Well No. 1 Office Address 802 Union National Bank Bldg., Wichita, Kansas Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole Date well completed 5-20-53 19 Application for plugging filed Sept. 14, 1953 Application for plugging approved Sept. 14, 1953 Plugging commenced Sept. 21, 1953 Plugging completed Sept. 26, 1953 Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty Producing formation Depth to top Bottom Total Depth of Well 3900 Feet Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Row 1: 8-5/8, 231, none. Row 2: 5-1/2, 3899, 3431.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole from 3900 to 3830 with sand, dumped 4 sacks cement. Filled hole with heavy mud to 230. Placed rock bridge from 230 to 220. Dumped 15 sacks cement. Filled hole with heavy mud to 30 feet and dumped 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor R & S Pipe Pulling Company Address

STATE OF Kansas, COUNTY OF Sedgwick, ss. Louis E. Potucek (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Louis E. Potucek 802 Union National Bank Bldg. (Address)

SUBSCRIBED AND SWORN TO before me this 6th day of October, 1953

My commission expires April 29, 1957



Norma Riches Notary Public

PLUGGING FILE SEC 13 T 13 R 20W BOOK PAGE 128 LINE 33

RECEIVED STATE CORPORATION COMMISSION OCT-7 1953 10-07-1953 CONSERVATION DIVISION Wichita, Kansas

Gerken #1

Operator: Braden Drilling Company
Contractor: Braden Drilling Company

13-138-20W
SW SW SW
Ellis County, Kansas

Test Commenced: 5-8-53
Test Completed: 5-20-53

Elevation: 2167 D.F.

Casing Records:
231' 8-5/8 casing. Cemented with 150 sacks cement, 2% calcium chlorid.
5 1/2" set at 3899. Cemented with 75 sacks cement.

Chalk	75
Shale	231
Shale & Shells	556
Sand	675
Shale & Sand	1240
Shale	1520
Anhydrite	1560
Shale	1720
Shale & Lime	1875
Shale	2175
Shale & Lime	2325
Broken Lime	2560
Lime	2730
Shale	2915
Lime & Shale	3110
Shale	3275
Lime & Shale	3365
Lime	3420
Lime & Shale	3490
Lime	3755
Cherty Lime	3819
Chert	3841
Cherty Lime	3851
Lime	3875
Lime & Sand	3900 T.D. R.B.

STATE OF KANSAS,
(88t-
SEDGWICK COUNTY,)

I hereby certify that the above information is true and correct as revealed by the records of the Braden Drilling Co.

Doris E. Poteruk

Subscribed and sworn to before me this 25th day of May, 1953.

Norma Pichey
Notary Public

My commission expires: April 29, 1957



PLUGGING
FILE SEC 13 T 13 R 20W
BOOK PAGE 128 LINE 33

10-07-1953