

STATE OF KANSAS
STATE CORPORATION COMMISSION
209 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-121-26801-000

LEASE NAME Qualizza

WELL NUMBER # 6

4950 Ft. from S Section Line

4300 980 Ft. from E Section Line

SEC. 28 TWP. 16 RGE. 24 (E) or (W) see

COUNTY Miami

Date Well Completed 5-1-87

Plugging Commenced 3:00 PM 4-26-95

Plugging Completed 4:00 PM 4-26-95

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR D.M. Milliken

ADDRESS 1009 Orleans Topeka, Ks. 66604

PHONE# (913) 273-1624 OPERATORS LICENSE NO. 9875

Character of Well Oil

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on 4-26-95 (date)

by Leon Winters (KCC District Agent's Name).

Is ACO-1 filed? Unk If not, is well log attached? Yes

Producing Formation _____ Depth to Top _____ Bottom _____ T.D. 503

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from ___ feet to ___ feet each set.

Alt. II Completed with 2 7/8 set at 486'. Squeezed from TD to surface with 17 sx of cement. Shut in @ 450 psi.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Town Oil Company License No. 6142

Address 16205 W. 287th St. Paola, Kansas 66071.

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Town Oil Company

STATE OF Kansas COUNTY OF Miami, ss.


Lester Town (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Lester Town


(Address) 16205 W. 287th St. Paola, Ks. 66071

SUBSCRIBED AND SWORN TO before me this 5th day of May, 19 95

Rec'd 5-11-95



Donna Jean Barnhart
Notary Public

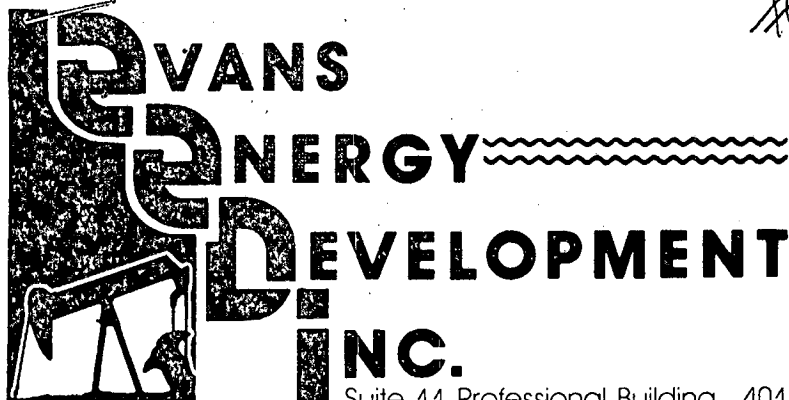

Suite 11 Professional Building 401 S. Main Ottawa Kansas 66067 (913)242-5733

Custom
oil & gas
drilling
Lease Development

WELL LOG
Qualizza #6
 D.M. Milliken 4/29/87 - 5/1/87

Thickness of Strata	Formation	Total
6	Soil & Clay	6
32	Limestone	38
3	Shale	41
2	Lime	43
49	Shale	92
10	Lime	102
14	Sand	116
16	Shale	132
3	Lime	135
48	Shale	183
11	Lime	194
15	Shale	209
27	Lime	236
8	Shale	244
17	Lime	261
3	Shale	264
15	Lime	279
23	Shale	302
6	Sand	308
114	Shale	422
1	Broken Sand	423
5	Solid Sand	428
2	Shale	430
1	Limey Sand	431
4.5	Solid Sand	435.5
2.5	Broken Sand	438
5	Shale	443
33	Shale	476
5	Lime	481
2	Shale	483
4	Lime	487
6	Shale	493
10	Lime	503

White Sand no Show

Slight oil show

Oil Show Core

Very Gassy

No Show

Bleeding well

Best to perforate 431.5-435.5

T.D.

Set Seating nipple at 468, Rathole 57.05, nipple & collar 1,
 Total pipe 486.05
 Set 20.2' surface casing with 4 sacks Portland cement

Qualizza #6 cont.

Started core at 423'

1	:34	424
2	:33	425
3	:49	426
4	:49	427
5	:43	428
6	:51	429
7	1:05	430
8	2:58	431
9	2:30	432
10	1:06	433
11	1:05	434
12	1:10	435
13	1:14	436
14	1:25	437
15	1:23	438
16	1:25	439
17	1:40	440
18	1:57	441
19	1:45	442