


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County, Sec. 23 Twp. 11 Rge. 17 (E) (W)

Location as "NE/CNW/SW" or footage from lines. NW 1/4
Lease Owner Great Bend Pipe & Supply Co., Inc.
Lease Name J.L. Rumsey Well No. # 8
Office Address P. O. Box 191 Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed yes 19
Application for plugging approved yes 19
Plugging commenced 6-8-61 19
Plugging completed 6-11-61 19
Reason for abandonment of well or producing formation

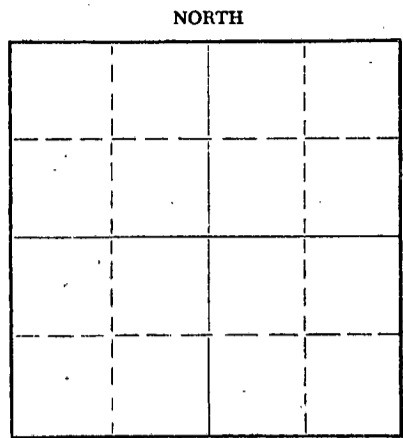

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well PB 3290' Feet
Show depth and thickness of all water, oil and gas formations. 3469' AUB ea

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				7"		2723'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Plugging commenced 6-8-61. Plugging completed 6-11-61.
Measured TD: Plug at 3290'.
Plugged off bottom: Sanded back to 3000' and dumped 5 sacks of cement.
Worked and shot 7" casing free at 2723'. Built rack and slide. Pulled and layed down casing.
Plugged well: Mudded with heavy mud up to 450' and circulated hole with 35 sacks of gel mud. Displaced through 7" 20 sacks of cement at 450'. Mudded up to 170' and displaced 20 sacks of cement at 170'. Mudded up to 30' and set 10' rock bridge at 30'. Capped the well with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
06-14-61
JUN 14 1961

Name of Plugging Contractor Forbes Casing Pulling, Inc.
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
Great Bend, Kansas (Address)



SUBSCRIBED AND SWORN to before me this 12th day of June, 19 61
My commission expires December 8th, 1963
Kayann Jenkins Notary Public.