

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Bldg.
Wichita, Kansas 67202

Form CP-4
Rev. 12-15-80

WELL PLUGGING RECORD 13-051-22933-00-00

Give All Information Completely
Make Required Affidavit

COUNTY Ellis SEC. 25 TWP. 13S RGE. 18 EXW
Location as in quarters or footage from lines:
W/2 SW/4 NE/4

Locate Well
correctly on above
Section Platt.

Lease Owner Terry Smith
Lease Name Gross Well No. 1
Office Address 943 Elm, Medicine Lodge, KS 67104
Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole
Date Well Completed March 25, 1982
Application for plugging filed verbal agreement
Plugging commenced March 25, 1982
Plugging completed March 25, 1982
Reason for abandonment of well or producing formation Dry

Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Scheck
Producing formation Depth to top bottom T.D. 3700'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
				8-5/8"	258'	none

Describe in detail the manner in which the well was plugged, indicating where the mud
fluid was placed and the method or methods used in introducing it into the hold. If cement
or other plugs were used, state the character of same and depth placed, from feet
to feet for each plug set.

720' - 70 sxs
250' - 40 sxs
40' - 10 sxs
R.H. - 10 sxs

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Halliburton Services

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Gary Younger (agent of owner) or (owner or operator) of the
above-described well, being first duly sworn on oath, says: That I have knowledge of the
facts, statements, and matters herein contained and the log of the above-described well as
filed and that the same are true and correct. So help me God.

(Signature) [Signature]
251 N. Water, Suite 18, Wichita, KS 67202
(Address)

1-1-82
RECEIVED
STATE CORPORATION COMMISSION
SUBSCRIBED AND SWORN TO before me this 30th day of March, 1982

COLEEN B. THOMAS
Sedgwick County, Ks.
My Appt. Exp. 5/12/84
My Commission Expires May 12, 1984

Coleen B. Thomas
Coleen B. Thomas Notary Public.

KANSAS DRILLERS LOG
15-051-22933-00-00

COMPANY Terry Smith

SEC. 25 T. 13S R. 18W
LOC. W/2 SW/4 NE/4

FARM Gross

NO. 1

COUNTY Ellis

ROTARY TOTAL DEPTH 3700'

COMM. March 17, 1982

COMP. March 25, 1982

CONTRACTOR H-30, INC. (Rig No. 11)

ISSUED March 30, 1982

CASING

10 3/4"

8 5/8" - set at 258' cemented w/175 sxs cement

ELEVATION 2083' K.B.

5 1/2"


4 1/2"

FIGURES INDICATE BOTTOM OF FORMATIONS

Shale and Shells	262'
Shale	770'
Sand	970'
Shale	1315'
Anhydrite	1361'
Shale and Lime	1664'
Shale	2026'
Lime and Shale	2605'
Shale and Lime	2830'
Lime and Shale	3338'
Lime	3700'
Rotary Total Depth	3700'

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.


H-30, INC.

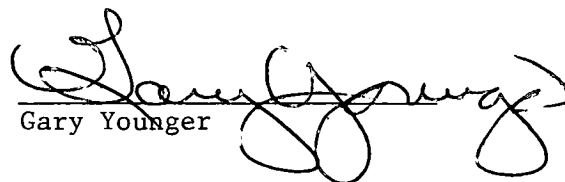
Gary Younger

State of Kansas)
County of Sedgwick) ss:

Subscribed and Sworn to before me, a Notary Public, in and for said county and state this 30th day of March, 1982.

My Commission Expires: May 12, 1984




Coleen B. Thomas

STATE OF KANSAS RECEIVED
APR - 1 1982
CONSERVATION DIVISION
Wichita Kansas