


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Ellis County. Sec. 21 Twp. 11 Rge. (E) 17 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
Lease Owner Cities Service Oil Co.
Lease Name Bemis Well No. 7
Office Address Bartlesville, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 7-17-37 19.
Application for plugging filed 3-23-51 19.
Application for plugging approved 3-24-51 19.
Plugging commenced 5-9-51 19.
Plugging completed 5-11-51 19.
Reason for abandonment of well or producing formation non-commercial

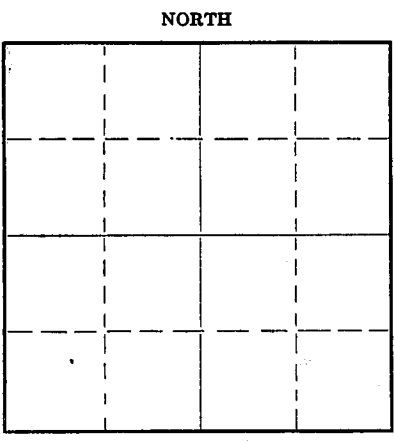

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 11-3-51 19.
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty
Producing formation Silicious Lime Depth to top 3396' Bottom Total Depth of Well 3401 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Silicious Lime				15 1/2"	126'	0
				10"	1103'	0
				7"	3395'	2506'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with mud to 290', put in 10' of rock to 280', dumped 20 sacks cement at 280'. Filled with mud to 35' of cellar. Put in 10' of rock, dumped 11 sacks of sement to cap.

RECEIVED
STATE CORPORATION COMMISSION
MAY 19 1951
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Mr. R. C. Cooper
Address Box 751, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
James Porter (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James Porter

Box 553, Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 18th day of May, 1951

W. D. Smith Notary Public.

My commission expires 3-12-1955

PLUGGING
FILE SEC 21 T 11 R 17 W
BOOK PAGE 61 LINE 45

Company Cities Service Oil Co. Well No. 7 Farm Bemis
 Location 1550' North & 992' West of SE Corner Sec. 21 T. 11 R. 17W
 Elevation _____ County Ellis State Kansas
 Initial Prod. 1710 oil, 0 water, 24 hrs. Contractor J. E. Mabee
 Acid None Dr'g. Comm. June 18, 1937
 T. D. 3397' Dr'g. Comp. July 11, 1937

CASING RECORD:

15-1/2" @ 115' cem. w/ 105 sacks
 10-3/4" @ 1103' cem. w/ 440 sacks
 7" OD @ 3395' cem. w/ 250 sacks

lime 3390
 sand (cored, oil) 3394
 shale & cong. (cored) 3395
 lime 3396

SLM Corr. 3396 = 3397

FORMATION RECORD:

surface clay 25
 shale & shells 300
 sand 350
 sticky shale 410
 shale 465
 sand 535
 shale & shells 650
 sand 755
 shale & shells 774
 stick shale w/ shells
 & iron pyrite 850
 shale & shells 1055
 sticky shale 1110
 anhydrite 1150
 lime shells & shale 1257
 red bed & shale 1350
 shale & shells 1493
 salt 1675
 shale & shells 1705
 lime broken 1765
 lime 1965
 lime broken 2084
 lime & shale 2185
 lime broken 2248
 lime shale 2454
 shale & shells 2550
 shale 2820
 lime & shale 2873
 lime broken 2883
 lime 2965
 lime & shale 2995
 lime 3100
 lime & shale 3132
 lime 3244
 lime broken **PLUGGING** SEC 21 T 11 R 17
 200K PAGE 68 LINE 45

Top Simpson Cong. 3373'
 Top Arbuckle 3396'
 Penetration 1'
 Total Depth 3397'

SYFO RECORD: 2000' 0°
 2500' 0°
 3000' 2°