


STATE OF KANSAS
STATE CORPORATION COMMISSION

15-057-20013-00-01
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

County. Ellis Sec. 15 Twp. 13 Rge. 18 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____
SW SW SE
Lease Owner R. P. Nixon Operations
Lease Name Pfeifer #1 Well No. _____
Office Address Hays, Kansas 67601
Character of Well (Completed as Oil, Gas or Dry Hole) _____

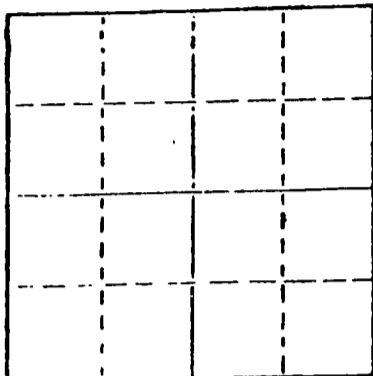

Locate well correctly on above
Section Plat

Date Well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 10/7/78 _____ 19____
Plugging completed 10/19/78 _____ 19____
Reason for abandonment of well or producing formation
depleted.

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3699
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	609	none
				4 1/2"	3699	2004'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pushed plug to 3200' and ran 10' of sand, bridge hole at 420'. Had to get sand pump and joint of 2 1/2" tubing, put weight in tubing. Couldn't knock bridge out. Loaded pole with water, had water truck pump against bridge. Had pulling unit come out and knock sand bridge out with sand pump. Shot pipe at 2007', pulled 51 joints. Pumped 20 sacks gel, plug, 70 pos, 2 1/2, 7 sacks gel, 30 sacks pos, 2 1/2.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS


STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS

(Address)

SUBSCRIBED AND SWORN TO before me this 26th day of October, 19 78

My commission expires _____



Margaret Melcher
Notary Public.
STATE CORPORATION COMMISSION

OCT 30 1978
10-30-78
CONSERVATION DIVISION
Wichita, Kansas