

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-077-21597-00-00  
Spot: NESWNESE Sec/Twnshp/Rge: 13-31S-9W  
1925 feet from S Section Line, 755 feet from E Section Line  
Lease Name: GRABS Well #: B3  
County: HARPER Total Vertical Depth: 2956 feet

Operator License No.: 31191  
Op Name: R & B OIL & GAS, INC.  
Address: 912 N LOGAN PO BOX 195  
ATTICA, KS 67009

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	267		200 SX CMT.
T1	2.375	2943		
PROD	4.5	2951	1800	40/100 SX CMT.

Well Type: GAS UIC Docket No: Date/Time to Plug: 07/22/2010 12:00 PM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: DAVE BRADY Company: QUALITY WELL SERVICE Phone: (620) 727-3410

Proposed Plugging Method: SAND BACK 50' ABOVE THE BOTTOM OF THE SURFACE PIPE AND CAP WITH 4 SKS OF CMT. RECOVER CASING. PULL CASING TO 1450', SPOT 35 SKS OF CMT. PULL CASING TO 950' SPOT 35 SKS CMT PULL CASING TO 320' AND CIRC CMT TO SURFACE.

Plugging Proposal Received By: STEVE VANGIESON Witness Type: PARTIAL  
Date/Time Plugging Completed: 07/22/2010 6:30 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

THE OPEN HOLE WAS SANDED BACK TO 2900' AND CAPPED WITH 4 SKS OF CMT. THE CASING WAS RECOVERED FROM 1800' AND PULLED TO 1450', WHERE 35 SKS OF CMT WAS SPOTTED. THE CASING WAS PULLED TO 950', WHERE 35 SKS OF CMT WAS SPOTTED. THE CASING WAS PULLED TO 320', WHERE CMT WAS CIRCD TO SURFACE.

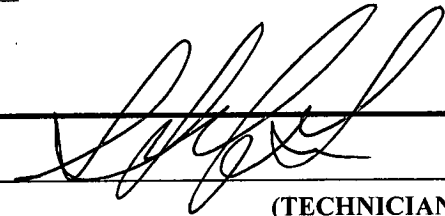
Perfs:

Top	Bot	Thru	Comments
2951	2956	CSG	

Remarks: QUALITY WELL SERVICE #5055 60/40 4% GE;

Plugged through: CSG

District: 02

Signed  (TECHNICIAN)

RECEIVED  
SEP 27 2010  
9-27-10  
KCC WICHITA