

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-051-26092-00-00
Spot: S2N2SENE Sec/Twnshp/Rge: 2-13S-18W
1880 feet from N Section Line, 660 feet from E Section Line
Lease Name: CRISSMAN B Well #: 4
County: ELLIS Total Vertical Depth: 3710 feet

Operator License No.: 32158
Op Name: H & B PETROLEUM CORP.
Address: 130 E ROSS STE 103
CLEARWATER, KS 67026

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	320		

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 02/18/2011 12:00 PM
Plug Co. License No.: 33350 Plug Co. Name: SOUTHWIND DRILLING, INC.
Proposal Rcvd. from: FRANK ROME Company: H&B PETROLEUM CORP. Phone: (620) 584-6380

Proposed Plugging Method: Ordered 245 sxs 60/40 pozmix - 4% gel with 1/4# flocele per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: DAVID WANN Witness Type: NONE
Date/Time Plugging Completed: 02/18/2011 6:30 PM KCC Agent: DAVID WANN

Actual Plugging Report:

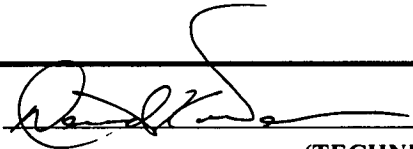
1st. Plug at 3610' w/25 sxs.
2nd. Plug at 1340' w/25 sxs.
3rd. Plug at 680' w/100 sxs.
4th. Plug at 370' w/40 sxs.
5th. Plug at 40' w/10 sxs.
Rathole with 30 sxs.
Mousehole with 15 sxs.

Perfs:


Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed  (TECHNICIAN) CM

MAR 04 2011

RECEIVED Form CP-2/3
MAR 08 2011 
KCC WICHITA