

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-109-20984-00-00
Spot: SEWNENESE Sec/Twnshp/Rge: 35-15S-32W
2256 feet from S Section Line, 700 feet from E Section Line
Lease Name: HOEME Well #: 1-35
County: LOGAN Total Vertical Depth: 4720 feet

Operator License No.: 5214
Op Name: LARIO OIL & GAS COMPANY
Address: 301 S MARKET ST
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	210		

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 03/08/2011 12:00 PM
Plug Co. License No.: 33575 Plug Co. Name: WW DRILLING, LLC
Proposal Rcvd. from: KIRBY Company: LARIO OIL & GAS COMPANY Phone: (316) 265-5611

Proposed Plugging Method: Ordered 205 sxs 60/40 pozmix - 4% gel with 1/4# flocele per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: DAVID WANN Witness Type: NONE
Date/Time Plugging Completed: 03/08/2011 3:00 PM KCC Agent: DAVID WANN

Actual Plugging Report:

1st. Plug at 2360' w/25 sxs.
2nd. Plug at 1250' w/100 sxs.
3rd. Plug at 260' w/40 sxs.
4th. Plug at 40' w/10 sxs.
Rathole with 30 sxs.

Perfs:


RECEIVED
MAR 16 2011
KCC WICHITA

Remarks: CONSOLIDATED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed

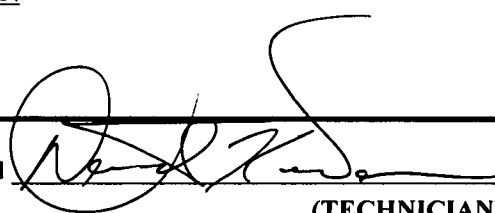

(TECHNICIAN)

CM

Form CP-2/3

✓ 3/8

MAR 09 2011