

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-095-21140-00-00  
Spot: SESESENW Sec/Twnshp/Rge: 34-30S-7W  
2350 feet from N Section Line, 2350 feet from W Section Line  
Lease Name: NORRIS C Well #: 1  
County: KINGMAN Total Vertical Depth: 4750 feet

Operator License No.: 4706  
Op Name: MESSENGER PETROLEUM, INC.  
Address: 525 S MAIN ST  
KINGMAN, KS 67068

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	264		CIRC. TO SURF.
HOLI	4.5	3403	3405	
PROD	4.5	4715	2850	TOC @ 3975
RBP	4.5	3415		

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 01/28/2011 8:00 AM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: JON F. MESSENGER Company: MESSENGER PETRO Phone: (620) 532-5400

Proposed Plugging Method: PLG BOTTOM WITH SAND AND CAP WITH 4 SKS OF CMT. 35 SKS 1300', 35 SKS 800', CIRC CMT FROM 300'-0'.

Plugging Proposal Received By: STEVE VANGIESON Witness Type: PARTIAL  
Date/Time Plugging Completed: 02/04/2011 3:30 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

RODS AND TUBING STUCK IN HOLE. SHOT OFF AND RECOVERED THE TUBING AT SET CIBP AT 3418' AND 2 SKS OF CMT. SANDED BACK THRU THE CASING TO 3350 AND CAPPED WITH 4 SKS OF CMT. RECOVERED THE CASING FROM 2850 AND PULLED TO 1300', WHERE 35 SKS OF CMT WAS SPOTTED. PULLED CASING TO 800' AND SPOTTED 35 SKS OF CMT. PULLED CASING TO 265' AND CIRCULATED CMT TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
4369	4377	CSG	
4340	4358	CSG	

Remarks: QUALITY WELL SERVICE 60/40 4% GEL

Plugged through: CSG

District: 02

Signed \_\_\_\_\_

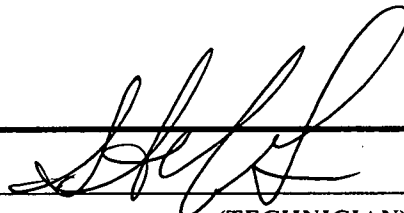

(TECHNICIAN) RECEIVED

MAR 03 2011 Form CP-2/3

KCC WICHITA

3/1/8

JK