

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-095-00334-00-00  
Spot: NENESW Sec/Twnshp/Rge: 3-30S-7W  
2310 feet from S Section Line, 2970 feet from E Section Line  
Lease Name: SITTS Well #: 1  
County: KINGMAN Total Vertical Depth: 4225 feet

Operator License No.: 8740  
Op Name: BRAMWELL PETROLEUM, INC.  
Address: 15183 SW 25TH AVE  
SPIVEY, KS 67142

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	250		190 SX
PROD	5.5	4224	320	90 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 07/13/2010 10:00 AM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE Phone: (316) 727-3410

Proposed Plugging Method: SAND BACK PERFS TO 4100' AND CAP WITH 5 SKS RECOVER CASING. 35 SKS 1200', 35 SKS 700', CIRC CMT FROM 300'-0'.

Plugging Proposal Received By: STEVE VANGIESON WitnessType: PARTIAL  
Date/Time Plugging Completed: 07/13/2010 2:30 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

THE PERFS WERE COVERED WITH SAND TO 1400', AND CAPPED WITH 5 SKS OF CMT. THE CASING PARTED AT 320. THE CASING WAS PULLED FROM THE WELL BORE. THE CASING WAS PERFORATED AT 1200' WHERE 50 SKS OF CMT WAS SPOTTED. THE CASING WAS PERFORATED AT 700', WHERE 50 SKS OF CMT WAS SPOTTED. THE HOLE WAS CIRCULATED FROM 300'-0' WITH TUBING

Perfs:

Top	Bot	Thru	Comments
4147	4157	CSG	PF

10/14/11  
2011060101

RECEIVED  
AUG 02 2010


KCC WICHITA

Remarks: QUALITY WELL SERVICE CEMENTING 60/40 4% GEL

Plugged through: TBG

District: 02

Signed

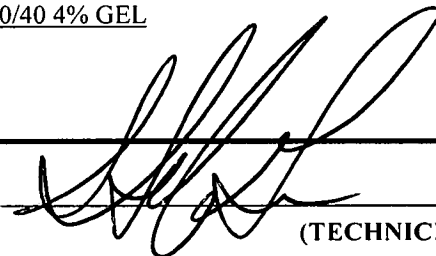

(TECHNICIAN)

✓