

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-095-20074-00-00
Spot: SENENW Sec/Twnshp/Rge: 1-27S-8W
4342 feet from S Section Line, 3096 feet from E Section Line
Lease Name: STUCKY LUCY Well #: 1
County: KINGMAN Total Vertical Depth: 3720 feet

Operator License No.: 6139
Op Name: BOYER, JAY C. ESTATE (DECEASED) D
Address: PO BOX 511
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	251		250 SX
PROD	5.5	3719		125 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/16/2010 9:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKES TESTING & SALVAGE Phone: (620) 938-2943

Proposed Plugging Method: SAND BACK 50 FEET ABOVE THE PERFS AND CAP WITH 5 SKS OF CMT. 35 SKS 1200', 35 SKS 700, CIRC 300'-0'

Plugging Proposal Received By: B. J. HOPE Witness Type: PARTIAL
Date/Time Plugging Completed: 08/16/2010 9:00 AM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

CASING SQUEEZE AT 1450' WITH 150 SKS CMT. RAN TUBING INSIDE THE TUBING TO 1200', WHER 35 SKS OF CMT WAS SPOTTED. PULLED TUBING 718', PERFS AT 700', SPOTTED 35 SKS OF CMT. PULLED TUBING TO PERFS AT 300' AND CIRCULATED CMT TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
3641	3645		CSG

Remarks: COPELAND CMT AND ACID 60/40 POZ 4% GEL

Plugged through: CSG

District: 02

Signed

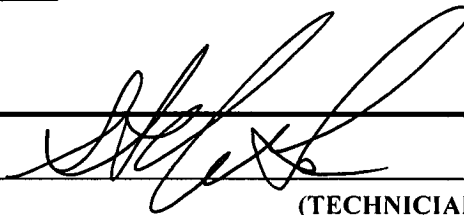

(TECHNICIAN)

RECEIVED

SEP 27 2010

KCC WICHITA

JK