

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-095-20620-00-00
Spot: SESENE Sec/Twnshp/Rge: 7-30S-7W
3300 feet from S Section Line, 330 feet from E Section Line
Lease Name: KOHMAN Well #: 5
County: KINGMAN Total Vertical Depth: 4575 feet

Operator License No.: 8740
Op Name: BRAMWELL PETROLEUM, INC.
Address: 15183 SW 25TH AVE
SPIVEY, KS 67142

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	256		200 SX
PROD	4.5	4313	285	175 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 07/07/2010 12:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE Phone: (620) 727-3409

Proposed Plugging Method: BOTTOM HAS ALREADY BEEN PLUGGED. CASING PARTED AT 285' TRY TO GET INSIDE CASING TO PERF AND PLUG. 1200', 700', 300'-0'.

Plugging Proposal Received By: STEVE VANGIESON Witness Type: PARTIAL
Date/Time Plugging Completed: 07/07/2010 5:30 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

TUBING AND BIT WAS RUN DOWN THE SURFACE CASING. UNABLE TO GET INSIDE THE 4.5. RAN TUBING DOWN THE OUTSIDE OF THE 4.5 TO 700', WHERE THE TUBING AND BUT WERE UNABLE TO MAKE ANY FURTHER HOLE. THE BIT WAS TORQUEING UP AND GRABBING. A 50 SKS CMT PLUG WAS SPOTTED AT 700', THROUGH THE TUBING. THE TUBING WAS PULLED TO 285' AND THE HOLE WAS CIRCULATED WITH CEMENT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
4147	4157	CSG	

10/14/11
2011060101


RECEIVED
AUG 02 2010
KCC WICHITA

Remarks: QUALITY WELL SERVICE CMTING 60/40 4% GEL

Plugged through: TBG

District: 02

Signed _____

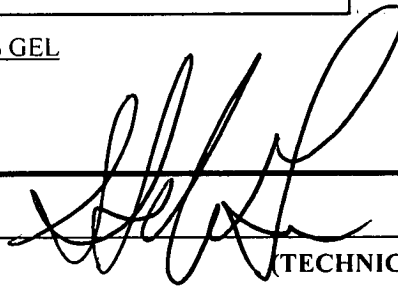

(TECHNICIAN)

VJR