

15-195-20119-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

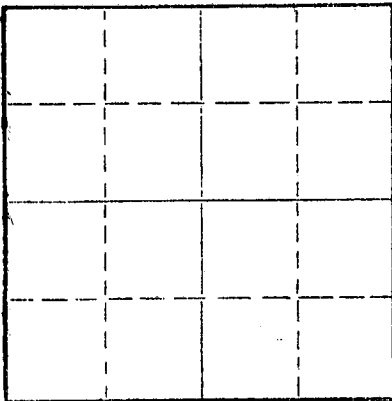

Locate well correctly on above
Section Plat

Trego County, Sec. 2 Twp. 13 Rge. 21 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SW NE NW
Lease Owner Shields Oil Producers, Inc.
Lease Name Helget Well No. 1
Office Address Shields Building, Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed June 20 19 69
Application for plugging filed June 20 19 69
Application for plugging approved June 20 19 69
Plugging commenced June 20 19 69
Plugging completed June 20 19 69
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Nichol
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,485 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	237'	Cmtd. w/ 170 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole w/heavy mud
Set bridge plug @ 1,350'
Pump 55 sax cement on plug thru 4 1/2" drill pipe
Set bridge plug @ 275'
Pump 20 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/heavy mud
Set bridge plug @ 40' w/ 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

RECEIVED
STATE CORPORATION COMMISSION
JUL 1 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Company, Inc.
Address Shields Building, Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
R. J. Shields (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Shields Building, Russell, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 30th day of June, 1969
[Signature]
Notary Public.






Shields

15-195-20119-00-00
Russell, Kansas

WELL LOG

Operator: Shields Oil Producers, Inc.
Well: Helget #1
Commenced: June 15, 1969
Completed: June 20, 1969
Contractor: Shields Drilling Company, Inc.

Well Description: SW NE NW
Sec. 2-13S-21W
Trego County, Kansas



CASING RECORD		
Size	Run	Pulled
8 5/8"	237'	Cmtd. w/170 sax

Elevation: 2,188' R. B.

Treatment:

Production: D & A

Tops:		
Topeka		3,201'
Heebner		3,450'
Toronto		3,472'

..... Figures Indicate Bottom of Formations

Sand & shale	250'
Shale, shells & sand	850'
Shale, sand & redbed	1,540'
Anhydrite	1,588'
Shale & shells	2,125'
Shale & lime	3,265'
Lime	3,375'
Lime & shale	3,460'
Lime	3,485' RTD

RECEIVED
STATE CORPORATION COMMISSION
JUL 1 1969
CONSERVATION DIVISION
Wichita, Kansas

Notes