


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Morris County. Sec. 35 Twp. 16 Rge. 5 (E) E (W)

Location as "NE/CNW&SW&" or footage from lines SE SE SE
Lease Owner Rosen-Schreiner Oil Company
Lease Name Grass Well No. 4
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 1-28-63 _____ 19____
Plugging completed 1-30-63 _____ 19____
Reason for abandonment of well or producing formation Depleted.

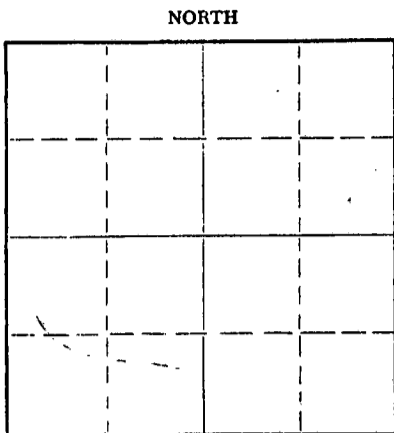

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Cecil Jones
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2241 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	145'	None
				5-1/2"	2196'	1989'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 2241', sanded to 2180' and dumped 5 sacks of cement @ 2180' with dump bailer. Pulled 5 1/2" casing. Checked hole, set rock bridge to 150' and ran 20 sacks of cement @ 150'. Mudded to 30', set rock bridge and ran 8 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

PLUGGING COMPLETE.

MAR 14 1963
4-14-63
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANAS KANSAS COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (OWNER) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of February, 1963

My commission expires May 20, 1964
Milton J. Tolis Notary Public.

STENCILED

JAN 27 1968

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

ORIGINAL

15-127-19018-0000R

COMPANY RAY LORIAUX

SEC. 35 T. 16 R. 5E

FARM Grass

NO. 4

LOC. SE SE SE

TOTAL DEPTH 2241'

COUNTY Morris

COMM. 5-7-52


COMP. 6-13-52

KANSAS

SHOT OR TREATED

CONTRACTOR Ray Loriaux

ISSUED 1-27-68



CASING

20	10
15	8
12	6
13	5

ELEVATION None

PRODUCTION 30 BOPD & 30 BW

FIGURES INDICATE BOTTOM OF FORMATIONS

COMPLETE DRILLERS LOG NOT AVAILABLE

TOPS: Log	
Mississippi	2194
TD	2241

RECEIVED
STATE CORPORATION COMMISSION
APR 23 1971
CONSERVATION DIVISION
Wichita, Kansas