

15-165 20021-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Rush County. Sec. 1 Twp. 16S Rge. (E) 16 (W)

Location as "NE/CNW/SW" or footage from lines NW SW NW
Lease Owner Lebsack Oil Production, Inc. & Chief Drilg. Co.,
Lease Name WAGNER Well No. 1 Inc.
Office Address Box 797 - Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 5/5 19 67
Application for plugging filed 5/5 19 67
Application for plugging approved 5/5 19 67
Plugging commenced 5/5 19 67
Plugging completed 5/5 19 67
Reason for abandonment of well or producing formation Dry Hole



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey - Hays, Kansas
Producing formation: Depth to top Bottom Total Depth of Well 3535 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	355	8-5/8"	355	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1 wooden plug & 100 sacks of 50-50 Pozmix, 4% Gel w/pump truck
@ 10:15 P.M.

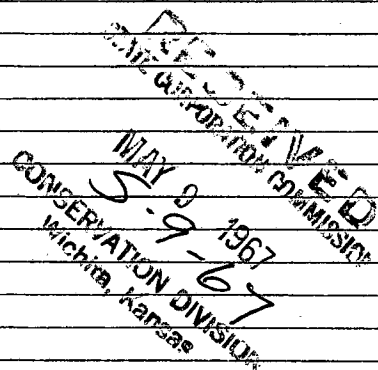

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Chief Drilling Co., Inc.
Address Box 797 - Great Bend, Kansas 67530

STATE OF KANSAS COUNTY OF BARTON, ss.
V. Richard Hoover (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. CHIEF DRILLING CO., INC.

(Signature) V. Richard Hoover
Box 797 - Gt. Bend, Kansas 67530
(Address)

Subscribed and sworn to before me this 8th day of May, 1967
Carmen R. Cook, Notary Public.
My commission expires Dec. 12, 1970



15-165-20021-0000

WELL LOG

Lebsack Oil Production, Inc.
Box 479
Hays, Kansas 67601

WAGNER #1
NW SW NW Sec. 1-16S-16W
Rush County, Kansas

Chief Drilling Co., Inc.
Box 797
Great Bend, Kansas 67530

Commenced: 4/27/67
Completed: 5/5/67

Contractor: Chief Drilling Co., Inc.

Casing Record: 8-5/8" @ 355' w/200 sacks 60-40 Pozmix, 2% Gel.

DRY & ABANDONED

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION</u>
			1937 Gr.
			1939 D.F.
			1942 K.B.
			<u>FORMATION TOPS</u>
Post Rock & Clay	0	120	Anhydrite 1030 + 912
Shale	120	215	Topeka 2943 -1001
Shale & Sand	215	260	Heebner 3168 -1226
Shale	260	356	Toronto 3186 -1244
Shale w/sand streaks	356	460	Lansing 3226 -1284
Dakota Sand	460	678	Conglomerate 3462 -1520
Red Bed	678	755	Arbuckle 3502 -1560
Red Bed & Shale	755	1030	Total Depth 3535 -1593
Anhydrite	1030	1065	
Shale & Shells	1065	1250	
Shale	1250	1600	
Shale & Lime	1600	1960	
Lime	1960	2305	
Shale, Shells w/Lime streaks	2305	2440	
Lime & Shale	2440	2943	
Lime	2943	3168	
Lime & Shale	3168	3226	
Lime	3226	3462	
Conglomerate	3462	3502	
Dolomite	3502	3535	
Total Depth	3535		

RECEIVED
MAY 9 1967
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS, COUNTY OF BARTON) SS

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the NW SW NW Sec. 1-16S-16W, Rush County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

V. Richard Hoover
V. Richard Hoover - President

Subscribed and sworn to before me this 8th day of May 1967.

Carmen R. Cook
Carmen R. Cook, Notary Public

My commission expires: December 12, 1970.