

CARD MUST BE TYPED

State of Kansas  
**NOTICE OF INTENTION TO DRILL**

CARD MUST BE SIGNED

(see rules on reverse side)

Starting Date: 6 19 1985  
month day year

OPERATOR: License # 5614  
Name Hutchinson Oil Co. 347

Address P.O. Box 642  
City/State/Zip Derby, Kansas 67037

Contact Person Steve Hutchinson  
Phone 316 262 1525

CONTRACTOR: License # 5418  
Name Allen Drilling Company

City/State Great Bend, Kansas 67530

Well Drilled For: Well Class: Type Equipment:

- Oil  Swd  Infield  Mud Rotary
- Gas  Inj  Pool Ext.  Air Rotary
- OWWO  Expl  Wildcat  Cable

If OWWO, old well info as follows:

Operator .....

Well Name .....

Comp Date ..... Old Total Depth .....

Projected Total Depth 4000 ..... feet

Projected Formation at TD Arbuckle

Expected Producing Formations Lansing-KC & Arbuckle

I certify that we will comply with K.S.A. 55-101, et seq., plus eventually plugging hole to K.C.C. specifications.

Date 6-17-85 Signature of Operator or Agent

*William S. Johnson* Title

API Number 15- 051-24261-00-00

SE NW NE Sec 15 Twp 13 S, Rge 20  
(location)  East  West

4290 Ft North from Southeast Corner of Section  
1650 Ft West from Southeast Corner of Section

(Note: Locate well on Section Plat on reverse side)

Nearest lease or unit boundary line 990 ..... feet.

County Ellis

Lease Name Wegele Well# 1-15

Domestic well within 330 feet:  yes  no

Municipal well within one mile:  yes  no

Depth to Bottom of fresh water 750 ..... feet

Lowest usable water formation Dakota

Depth to Bottom of usable water 800 ..... feet

Surface pipe by Alternate: 1  2

Surface pipe to be set 850 ..... feet

Conductor pipe if any required -0- ..... feet

Ground surface elevation 2149 ..... feet MSI.

This Authorization Expires 6-17-85

Approved By 6-17-85 *R*

MHC/LOHE 6-17-85  
owner


RECEIVED  
STATE CORPORATION COMMISSION

Must be filed with the K.C.C. five (5) days prior to commencing well  
This card void if drilling not started within six (6) months of date received by K.C.C.

JUN 17 1985

06-17-1985

CONSERVATION DIVISION  
A Regular Section of Land  
Wichita, Kansas  
1 Mile = 5,280 Ft.

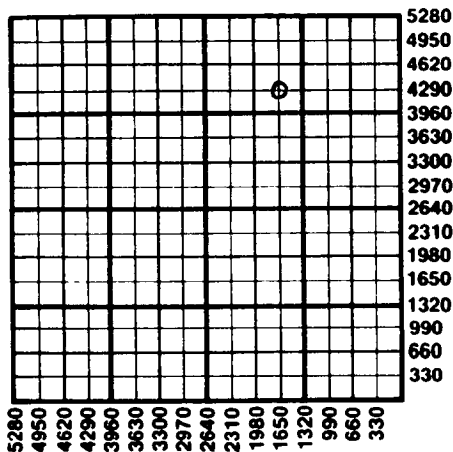

**Important procedures to follow :**

1. Notify District office before setting surface casing.
2. Set surface casing by circulating cement to the top.
3. File completion forms ACO-1 with K.C.C. within 90 days of well completion, following instructions on ACO-1, side 1, and including copies of wireline logs.
4. Notify District office 48 hours prior to old well workover or re-entry.
5. Prior to plugging, prepare a plugging plan, then obtain agreement from the appropriate district office for an approved plugging plan.
6. Submit plugging report (CP-4) to K.C.C. after plugging is completed.
7. Obtain an approved injection docket number before disposing of salt water.
8. Notify K.C.C. within 10 days when injection commences or terminates.
9. If an alternate 2 completion, cement in the production pipe from below any usable water to surface within 120 days of spud date.

State Corporation Commission of Kansas  
Conservation Division  
200 Colorado Derby Building  
Wichita, Kansas 67202  
(316) 263-3238