


15-195-00093-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Take Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Trego County. Sec. 23 Twp. 13S Rge. 21 (E) W (W)
Location as "NE/CNW%SW%" or footage from lines SE NW NW
Lease Owner O. A. Sutton
Lease Name Cross Well No. 1
Office Address 407 Insurance Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 4-23 19 59
Application for plugging filed 4-23 19 59
Application for plugging approved 4-23 1959
Plugging commenced 4-23 19 59
Plugging completed 4-23- 19 59
Reason for abandonment of well or producing formation Dry Hole

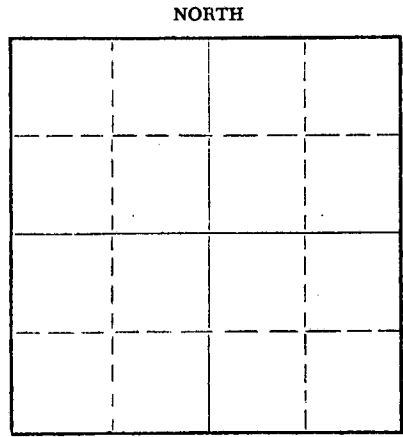

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Lieker
Producing formation Depth to top Bottom Total Depth of Well 3987 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	252'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with heavy mud from 3987 up to 600'. Set plug # 1 at 600'. Mixed 20 sacks cement. Filled with mud from 540' up to 200'. Set plug # 2 at 200'. Mixed 15 sacks cement. Filled from 155' up to 40' with mud. Set plug # 3 at 40'. Mixed 10 sacks cement.

2000
04-28-59


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Renfro Drilling Co.
Address 316 Insurance Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
A. L. Rhodes (employee of owner) or (owner operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

(Address)

SUBSCRIBED AND SWORN to before me this 27th day of April, 19 59



My commission expires November 9, 1961

[Signature] Notary Public.

PLUGGING
FILE SEC 23 T 13 R 21W
BOOK PAGE 34 LINE 7

O. A. Sutton, Cross #1
SE NW NW Sec. 23-13S-21W
Trego County, Kansas

Commenced - April 11, 1959
Completed - April 23, 1959
Casing - 252' of 8-5/8" csg. w/175 sacks cement
Elevation - 2293 KB

DRILLERS LOG

0 - 252	Surface
252 - 608	Shale and shells
608 - 1495	Shale and lime
1495 - 1653	Shale
1653 - 1835	Shale and lime
1835 - 2165	Lime and shale
2165 - 2340	Shale and lime
2340 - 2530	Lime
2530 - 2635	Lime
2635 - 2700	Lime
2700 - 2740	Lime
2740 - 2905	Shale and lime
2905 - 3055	Lime and shale
3055 - 3255	Shale and lime
3255 - 3367	Shale and lime
3367 - 3440	Lime
3440 - 3492	Lime
3492 - 3545	Lime
3545 - 3550	Lime
3550 - 3590	Lime
3590 - 3631	Lime
3631 - 3676	Lime
3676 - 3684	Lime
3684 - 3720	Lime
3720 - 3755	Lime
3755 - 3809	Lime
3809 - 3868	Lime and shale
3868 - 3895	Shale and lime
3895 - 3915	Chert
3915 - 3922	Chert
3922 - 3960	Lime
3960 - 3970	Lime and chert
3970 - 3987	Lime
3987 -	Rotary Total Depth D & A

RECEIVED
STATE COMMISSION
APR 28 1959
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) SS
SEDGWICK COUNTY)

I, the undersigned, being duly sworn on oath, state that the above Drillers Log is true and correct to the best of my knowledge and belief and according to the records of this office.

RENFRO DRILLING CO.

By Henry D. Fickan

Subscribed and sworn to before me this 27th day of April, 1959.

Lorraine Shultz
Notary Public

My commission expires
June 1, 1960.

PLUGGING
FILE SEC 23 T 13 R 21W
BOOK PAGE 34 LINE 7