


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Trego County. Sec. 10 Twp. 13S Rge. 21W(E) (W)
Location as "NE/CNW/SW" or footage from lines. SW SW NE
Lease Owner Burch Drilling Co., Inc.
Lease Name Cox Well No. 1
Office Address 1011 Union Center - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 3-14-58 19
Application for plugging filed 3-14-58 19
Application for plugging approved 3-14-58 19
Plugging commenced 3-14-58 19
Plugging completed 3-14-58 19
Reason for abandonment of well or producing formation Dry

NORTH

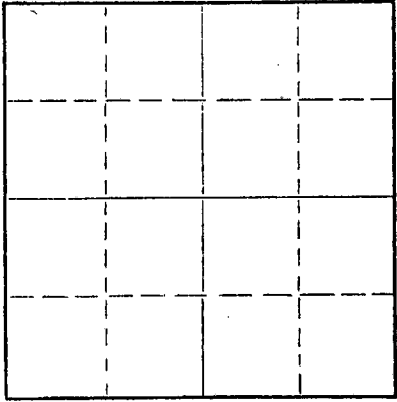

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well ~~XXXXXXXXXXXX~~ Gilbert P. Leiker
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3926 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	231	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set 1st plug @ 700' w/25 sx.
Set 2nd plug @ 200' w/10sx.
Set 3rd plug @ 40' w/ 10sx.


RECEIVED
STATE CORPORATION COMMISSION

MAR 31 1958
03-317958
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Burch Drilling Company, Inc.
Address 1011 Union Center

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Earl M. Burch (employer or owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) Earl M Burch

(Address) _____
Subscribed and sworn to before me this 28th day of March, 19 58
Genny Harrison
Notary Public.



PLUGGING
FILE SEC 10 T. 13 R. 21W
BOOK PAGE 89 LINE 50

195
15-~~151~~-00231-00-00

WELL LOG

Burch Drilling Company, Inc.
#1 Cox
SWSW NE 10-13S-21W
Trego County, Kansas

8 5/8" set @ 231' w/165 sx.
Elevation: 2172 KB
Comm.: 3-5-58
Comp.: 3-14-58
D & A

Tops:

230 Sand & Clay
1585 Shale & Shells
1585 Anhydrite
3483 Lime & Shell
3828 Lime
3926 Cherty lime

3926 RTD

Topeka 3211
Heebner 3438
Toronto 3458
Lansing 3476
BKC 3715
Marmaton 3794
Conglomerate 3866

DST #1 3472-3497 1 hr.
Rec. 5' Mud. All pressures
0#.

DST #2 3528-3550 1 hr.
Rec. 35' Mud. BHP 180#.

DST #3 3798-3828 1 hr.
Rec. 75' oil spotted muddy
saltwater. BHP 1180#.

STATE OF KANSAS, COUNTY OF SEDGWICK:

I, Earl M. Burch, president of Burch Drilling Co., Inc. being duly sworn on oath, state: That I have knowledge of the facts, statements and matters herein contained and that the same are true and correct.

Earl M Burch

Subscribed and sworn to before me this 28th day of March, 1958.



My commission expires: July 27, 1960

Garry Garrison
Notary Public

03-31-1958

PLUGGING
10-13-21W
BOOK PAGE 89 LINE 40