


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

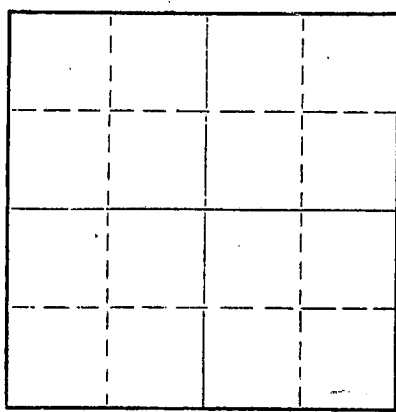

Locate well correctly on above
Section Plat

Trego County. Sec. 5 Twp. 13 Rge. 21 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines ~~S~~ S of S/2 of SW SW

Lease Owner Hellar Drilling Company, Inc.

Lease Name Siebel Well No. 1

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed _____ 19__

Application for plugging approved _____ 19__

Plugging commenced 2-20-65 _____ 19__

Plugging completed 2-25-65 _____ 19__

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3971 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	206'	None
				5-1/2"	3963'	3191'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 3971', pushed plug to 3300',
sanded hole to 3270' and dumped 5 sacks of
cement @ 3270' with dump bailer. Pulled 5 1/2"
casing, set rock bridge from 500' to 480'
and ran 6 yards of ready mix cement to base
of cellar.

RECEIVED
STATE CORPORATION COMMISSION

MAR 4 1965

PLUGGING COMPLETE.

03-04-65
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.

Noel J. Knight (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of February, 1965

My commission expires May 20, 1968

Milton J. Volin
Notary Public.

REC'D MAR 1 1965

Don Heller
15-195-30002-00-00 9

SEBEL NO. 1 WELL

LOCATION: $W\frac{1}{2}$ SW $\frac{1}{4}$ SW $\frac{1}{4}$ Sec. 5-135-21W
Trego County, Kansas

OWNERS: Heller Drilling Company, Inc.,
Virgil E. Spradlin, et al

OPERATOR: Heller Drilling Company, Inc.
Union Center Bldg., Wichita, Kansas

SURFACE CASING: 8-5/8" 206' new casing cemented at
206' with 160 sacks cement

OIL STRING: 3975' 5-1/2" casing set at 3963' with
150 sacks cement. Plug down 2 PM
December 21, 1964

DRILLING COMMENCED: 12-10-64
DRILLING COMPLETED: 12-21-64

L.O.G.

(Figures indicate bottom of formation)

0 -	100	Clay, Sand & Rock
	206	Shale
	965	Shale & shells
	1390	Sand & Shale
	1662	Red Bed
	1706	Anhydrite
	1710	Shale
	2100	Shale & shells
	3350	Lime and Shale
	3437	Lime
	3510	Lime & Shale
	3810	Lime
	3890	Lime & Shale
	3923	Cherty Lime
	3971	Lime
	3971	Rotary total depth

RECEIVED
STATE CORPORATION COMMISSION
FEB 11 1965
CONSERVATION DIVISION
Wichita, Kansas

The undersigned, Richard Hindery, one of the partners of Birmingham-Bartlett Drilling Co., hereby certifies that the above is a true and correct log of the Sebel No. 1 Well as shown in the daily drilling reports.

BIRMINGHAM-BARTLETT DRILLING CO.

By Richard Hindery
Richard Hindery, Partner

Subscribed and sworn to before me
this 22nd day of December, 1964.

Vivian F. Yinger
Vivian F. Yinger, Notary Public
My commission expires November 29, 1966.

