

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Trego County, Sec. 5 Twp. 13 Rge. 21 (E) (W) X

Location as "NE/CNW&SW" or footage from lines SW NW SW

Lease Owner Leo J. Dreiling Oil Company

Lease Name Siebel C Well No. 1

Office Address Victoria, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) D & A

Date well completed 11-27-64 19

Application for plugging filed 11-27-64 19

Application for plugging approved 11-27-64 19


Plugging commenced 11-27-64 19

Plugging completed 11-27-64 19

Reason for abandonment of well or producing formation -0-

If a producing well is abandoned, date of last production -0- 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

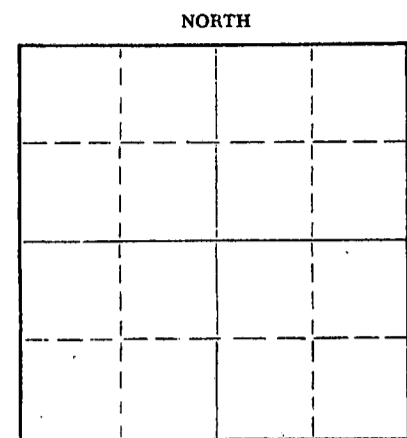

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation -0- Depth to top 0 Bottom 0 Total Depth of Well 4000' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe				8-5/8"	181'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with rotary mud to a depth of 540' where 1st plug was set using 20 sacks cement. Filling hole with rotary mud to a depth of 180' where (2) second plug was set using 20 sacks cement. Rotary mud was used to fill hole to a depth of 40' where 3rd plug was set using 10 sacks cement and filling hole to surface.

RECEIVED
STATE CORPORATION COMMISSION

DEC 9 1964
12-9-64

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor L. J. Dreiling & Sons, Inc.
Address Victoria, Kansas

STATE OF Kansas, COUNTY OF Ellis, ss.
I, Leo F. Dreiling, a partner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leo F. Dreiling
Victoria, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 8th day of December, 1964



Elmer Steltz
Notary Public.

15-195-19049-00-00

L. J. DREILING and SONS, Inc.
VICTORIA, KANSAS

WELL LOG

Company Leo J. Dreiling Oil Company
Victoria, Kansas

Farm Siebel "C" No. # 1

Total Depth 4000'

Comm. 11-19-64 Comp. 11-27-64

Contractor

Sec. 5 Twp. 13 Rng. 21

Location SW NW SW

County Trego

Elevation: 2254' D. F.

2252' G. R.

Casing Record

Cement Record

Production:

181' 8-5/8"

100 sacks

Figures Indicate Bottom of Formations

0'	181'	Shale
181'	658'	Shale
658'	1360'	Shale & Sand
1360'	1547'	Shale & Sand
1547'	1684'	Shale
1684'	1725'	Anhy.
1725'	1889'	Shale
1889'	2770'	Shale & Shells
2270'	2505'	Shale & Shells
2505'	2660'	Shale & Lime
2660'	2854'	Shale & Lime
2854'	3025'	Shale & Lime
3025'	3213'	Shale & Lime
3213'	3430'	Shale & Lime
3430'	3520'	Shale & Lime
3520'	3602'	Lime
3602'	3611'	Lime
3611'	3660'	Lime
3660'	3692'	Lime
3692'	3752'	Lime
3752'	3770'	Lime
3770'	3825'	Lime
3825'	3894'	Lime
3894'	3939'	Lime
3939'	3976'	Lime
3975'	4000'	T.D.

STATE OF KANSAS
DEC 9
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
)ss.
COUNTY OF ELLIS)

I, Leo F. Dreiling, of the L. J. Dreiling & Sons, Inc. upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from your Siebel C # 1.

Leo F. Dreiling
LEO F. DREILING

Subscribed and sworn to before me this 8th day of December, 1964.

Emery J. Jolly
NOTARY PUBLIC

My Commission Expires: October 26, 1968

