


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ellis County. Sec. 27 Twp. 13 Rge. 17 E/W
Location as "NE/CNW¹/SW¹" or footage from lines
C N/2 SW NE

Lease Owner D. R. Lauck Oil Co.
Lease Name Geist #3 Well No.
Office Address Ellinwood, Kansas 67526
Character of Well (Completed as Oil, Gas or Dry Hole)

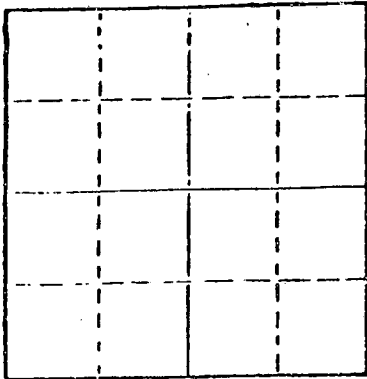

Locate well correctly on above
Section Plot

Date Well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 7/1/80 19
Plugging completed 7/1/80 19
Reason for abandonment of well or producing formation

depleted.
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Schmidt
Producing formation Depth to top Bottom Total Depth of Well 3535'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	1/4"	none
				5 1/2"	3528	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Allied pumped 25 sacks cement, 3 sacks hulls, 8 sacks gel, 125 sacks cement in the oil string and the back side was squeezed with cement before.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
R. DARBELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darbell Kelso
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of July, 1980



My commission expires

RECEIVED
STATE CORPORATION COMMISSION

JUL 18 1980

CONSERVATION DIVISION
Wichita, Kansas

D. R. Lauck Oil Company, Inc.,

Geist #3 C N 1/2 SW NE Sec. 27-13S-17W
Ellis County Kansas

Commenced: March 15, 1954
Completed: March 29, 1954

TD: 3530

Casing: 160' 8 5/8" casing cemented w/100 sax
3530' 5 1/2" casing cemented w/125 sax

Elevation: 1994 DF, 1996 KB

Surface clay	40
shale & shells	160
shale, shells & red bed	675
sand & sand stone	910
red bed & shells	1200
Anhydrite	1245
shale & lime	2250
broken lime	2320
lime	2370
shale & lime	2995
lime	3527
Arbuckle	3530

Rotary TD 3530

Tops

Topeka	2996
Heebner	3241
Toronto	3262
Lansing	3287
Arbuckle	3527

DST #1 3289-3322
Open 1 hour, fair steady blow
throughout, recovered 310'
slightly pil-cut and gas-cut
muddy salt water;
IFF o
FFF 160# BHP 980#
in 20 minutes

I hereby certify that this is a true and correct
log of the above mentioned well, to the best
of my knowledge and belief.

John H. Kuntz
Subscribed and sworn to before me this

29th day of OCTOBER 1979

Ray W. [Signature]
Notary Public

RECEIVED My commission expires July 17, 1980
STATE CORPORATION COMMISSION

OCT 30 1979

CONSERVATION DIVISION
Wichita, Kansas