


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

15-051-04413-00-00
WELL PLUGGING RECORD

Ellis County, Sec. 28 Twp. 13 Rge. 17W (E) (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE NE SW
Lease Owner J. E. Mishler
Lease Name Dreiling Well No. 1-C
Office Address Midwest Courts, Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 6, 1950 19
Application for plugging filed September 7, 1950 (verbal) 19
Application for plugging approved September 12, 1950 19
Plugging commenced September 6, 1950 19
Plugging completed September 8, 1950 19
Reason for abandonment of well or producing formation Dry Hole

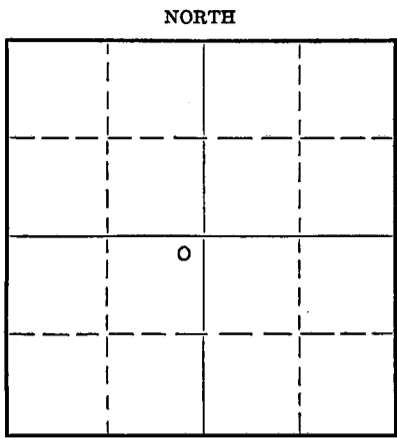

Locate well correctly on above Section Flat

If a producing well is abandoned, date of last production None 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas
Producing formation Depth to top Bottom Total Depth of Well 3541 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				4-1/2" OD	3404	2650
				8-5/8"	140	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

140 feet of 8-5/8" circulated with cement. 3404' of 4-1/2" with 150 sacks of cement behind. Top perf. at 3262', filled with chat to 3260 feet. Set 5 sacks of cement with dump bailer, pulled 2650 feet of 4-1/2 inch. Mudded hole to 125 feet; set rock bridge and 15 sacks of cement. Filled with mud to 35 feet; Set rock and 10 sacks of cement to bottom of cellar.

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to J. E. Mishler
Address Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. E. Mishler
Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 11th day of December 1950



Howard J. Taylor
Notary Public

12/12/53
PLUGGING
FILE SEC 28 T 13 R 17 W
BOOK PAGE 27 LINE 28

23-5091-s 8-50-10M

DEC 13 1950
12-13-50
CONSERVATION DIVISION
Wichita, Kansas

Drilling Log-Dreiling- Mishler

Dreiling C-1 NE NE SW Sec. 28-13S-17W
Ellis County Kansas

Drilled by Overland Drilling Company Great Bend

15.051.04413.00.00

0-70 surface clay
 70-105 sand and shale
 105-140 shells and shale
 140-700 " " "
 700-845 sand (Dakota)
 845-905 shale and red bed
 905-1185 shale and shells
 1185-1195 shale
 1195-1235 lime (Anhydrite)
 1235-1400 shale
 1400-1495 shale and red bed
 1495-1540 lime and shale
 1540-1570 shale and red bed
 1570-1700 lime shells and shale
 1700-1720 lime
 1720-1896 shale and lime
 1896-2045 lime
 2045-2120 lime and shale
 2120-2210 lime
 2210-2920 shale and lime
 2920-3050 lime
 3050-3160 shale and lime
 3160-3198 lime
 3198-3304 shale and lime
 3304-3437 lime
 3437-3475 shale and lime
 3475-3526 conglomerate
 3526-3541 lime total depth

Casing Record

8 5/8" surface casing set at 140'

4 1/2" Oil String set at 3403'
150 sacks cement

Good show oil 3265-3269
 " " " 3276-3282
 " " " 3298-3306
 Spotted Sat. 3328-3334

Perforated 3301-3309
acid 2500 gal.-h.f.w.

Lane Wells Plug @ 3295

Perforated 3274-3278 h.f.w.
squeezed " "

Perforated 3264-3267
acid 1000 ga. h.f.w.

Hole plugged Sept. 4, 1950

" Spudded August 5, 1950

RECEIVED
 STATE CORPORATION COMMISSION
 DEC 28 1950
 CONSERVATION DIVISION
 Wichita, Kansas

PLUGGING
 FILE SEC 28 T 12 R 17 W
 BOOK 27 LINE 22