


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

GOVE County, Sec. 20 Twp. 13S Rge. (E) 26 (W)

Location as "NE/CNW&SW" or footage from lines NW NW
Lease Owner Ferguson Oil Company
Lease Name KUNTZ Well No. 1
Office Address 522 Union Center Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 8-18-63 19____
Application for plugging filed 8-20-63 19____
Application for plugging approved 8-18-63 19____
Plugging commenced 8-18-63 19____
Plugging completed 8-18-63 19____
Reason for abandonment of well or producing formation dry hole

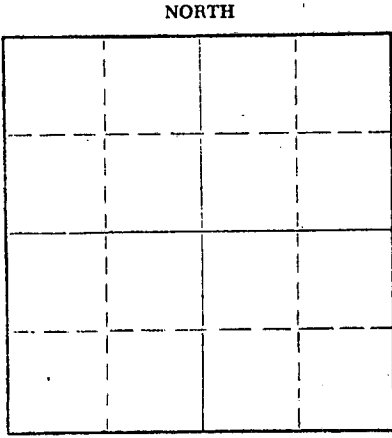

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4428 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	210'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud & plug @ 600' w/20 sx. cement thru. drill pipe
Heavy mud & plug @ 200' w/20 sx. cement thru. drill pipe.
Solid bridge @ 40' - plug w/10 sx. cement to base of cellar

Plugging complete

RECEIVED
STATE CORPORATION COMMISSION

AUG 21 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor K & E DRILLING, INC.
Address 719 Union Center Building, Wichita, Kansas


STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Wayne L. Brinegar of K & E Drilling, Inc.

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God:

(Signature) Wayne L. Brinegar
719 Union Center Building, Wichita, Kansas
(Address)

Subscribed and sworn to before me this 20th day of August, 19 63

August 30, 1965
Julene M. Bannon Notary Public.



15-063-00089-00-00

DRILLER'S WELL LOG

OPERATOR: Ferguson Oil Company
522 Union Center Building
Wichita, Kansas

WELL NAME: #1 KUNTZ
LOCATION: NW NW Sec. 20-13S-26W
Gove County, Kansas

CONTRACTOR: **K & E DRILLING, INC.**
719 UNION CENTER BLDG.
WICHITA, KANSAS

COMMENCED: 8-8-63

CASING RECORD: 8-5/8" @ 210' w/150 sx.

COMPLETED: 8-18-63

ELEVATION:

ROTARY TOTAL DEPTH: 4428'

PRODUCTION: D & A

FORMATION RECORD

Depths shown indicate bottom of formations encountered.

Soil & Clay	40
Sand	120
Shale	1170
Sand & Shale	1310
Lime & Shale	1462
Sand & Shale	1775
Red Bed	1989
Anhydrite	2005
Lime	2310
Lime & Shale	2715
Lime	3090
Lime & Shale	3225
Lime	4428 T.D.

RECEIVED
STATE CORPORATION COMMISSION

AUG 23 1963

CONSERVATION DIVISION
Wichita, Kansas

CERTIFICATION

State of KANSAS }
County of SEDGWICK } ss:

I, Wayne L. Brinegar, of K&E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the Driller's Log of the above named well.

Wayne L. Brinegar
Wayne L. Brinegar
August 22nd, 1963

Subscribed and sworn to before me this 22nd day of August, 1963

Julene M. Bannon
Julene M. Bannon Notary Public.

My Commission expires August 30, 1965

