


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

Gove County, Sec. 26 Twp. 13 Rge. 27W (E) (W)

Location as "NE/CNW/SW" or footage from lines C SW NE  
Lease Owner Chief Drilling Co., Inc.  
Lease Name Leighton Well No. 1  
Office Address Suite 905 Century Plaza, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed September 9, 1971 19  
Application for plugging filed September 8, 1971 19  
Application for plugging approved September 8, 1971 19  
Plugging commenced September 9, 1971 19  
Plugging completed September 9, 1971 19  
Reason for abandonment of well or producing formation \_\_\_\_\_

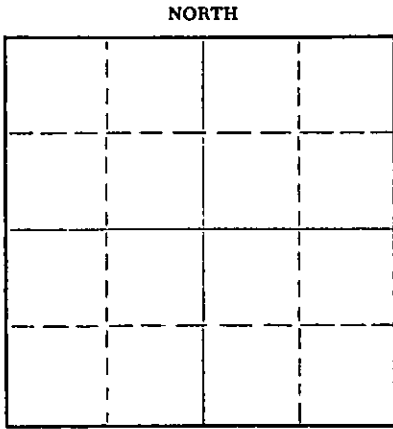

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4390 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	247	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged through drill pipe @ 960' w/100 sacks cement  
Plugged through drill pipe @ 275' w/25 sacks cement  
Plugged through drill pipe @ 40' w/10 sacks cement

RECEIVED  
STATE CORPORATION COMMISSION  
SEP 15 1971  
CONSERVATION DIVISION  
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Chief Drilling Co., Inc.  
Address Suite 905 Century Plaza, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Jim Robinson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Robinson  
Suite 905 Century Plaza, Wichita, Kansas  
(Address)

Subscribed and sworn to before me this 14th day of September, 19 71

Virginia S. Fabian  
Virginia S. Fabian Notary Public.



RECEIVED  
STATE CORPORATION COMMISSION  
SEP 15 1971  
CONSERVATION DIVISION  
Wichita, Kansas

WELL LOG

15-063-20083-00-00

CHIEF DRILLING CO., INC.  
Suite 905 Century Plaza  
Wichita, Kansas 67202

#1 R LEIGHTON  
C SW NE Sec. 26-13-27W  
Gove County, Kansas

CONTRACTOR: Company Tools  
CASING RECORD: Set 247' 8 5/8"  
w/170 sacks cement

COMMENCED: 8/31/71  
COMPLETED: 9/9/71

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION:</u>
Sand & Clay	0	254	2493 Gr.
Shale & Sand	254	1225	2495 D.F.
Sand, Shale & Shells	1225	1890	2498 K.B.
Shale & Shells	1890	1980	
Anhydrite	1980	2029	
Shale & Shells	2029	2110	
Shale & Sand	2110	2565	
Shale & Lime	2565	3945	
Lime	3945	4315	
Lime & Shale	4315	4370	
Mississippi	4370	4390	
Total Depth	4390		


  

<u>FORMATION TOPS:</u>			
Anhydrite	1980	+	518
Base Anhy.	2029	+	469
Heebner	3705	-	1207
Toronto	3724	-	1226
Lansing	3746	-	1248
Pawnee	4165	-	1667
Ft. Scott	4229	-	1731
Mississippi	4321	-	1823
T. D.	4390	-	1892

STATE OF KANSAS, COUNTY OF SEDGWICK) ss:


I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the C SW NE of Section 26-13-27W, Gove County, Kansas, to the best of my knowledge and belief.


CHIEF DRILLING CO., INC.



Jim Robinson, Vice President

and sworn to before me this 14th day of September, 1971.





Virginia S. Fabian, Notary Public

COMMISSION EXPIRES:  
AUGUST 5, 1975